

# Agilent N9340A Handheld Spectrum Analyzer

Technical Overview



Put the speed and performance of  
Agilent spectrum analysis  
in the hands of your engineers

# N9340A

## Handheld Spectrum Analyzer

### Know your spectrum

Regardless of whether you are handling military communications, a Wireless Service Provide (WSP), or involved with spectrum management you need to avoid intermittent communication. The N9340A provides you with a reliable, accurate and detailed picture of the spectrum over which you are working.



### Optimize your test time versus accuracy

When you test, you need fast data capture to help locate and identify elusive, transient interference signals. That's why every N9340A spectrum analyzer has a truly fast sweep time. It requires less time to measure across the bandwidth, to obtain more reliable test results – and helps you achieve more for the same investment of time and money.

### Gain confidence in your test results

Spurious signals and noise are of great concern to all network users. A superior combination of low displayed average noise level (DANL) and single sideband (SSB) phase noise coupled with narrower resolution bandwidth (RBW) means your signal measurements are more reliable and you will have more confidence in your test results. The N9340A's low DANL and SSB phase noise helps you detect very low-level signals (spurs or noise) which are close to the carrier. You will avoid missing these difficult-to-identify signals, which would otherwise lead to an insufficient or even incorrect understanding of the spectrum.

- Frequency range: 100 kHz to 3 GHz
- RBW: 30 Hz to 1 MHz in 1-3-10 sequence
- VBW: 3 Hz to 1 MHz
- SSB Phase noise: – 87 dBc at 30 kHz offset
- DANL: (10 MHz <  $f_c$  ≤ 1.5 GHz)
  - –124 dBm
  - –144 dBm with preamp
- Sweep speed
  - 10 ms to 1000 s, span ≥ 1 kHz
  - < 120 ms at full span
- Amplitude accuracy: ±1.5 dB

### Best resolution available

The N9340A's RBW is the narrowest in its class. The narrow 3 dB bandwidth of the analyzer ensures that it is even easier to identify, resolve, and measure two signals that are close together. Additionally, with a resolution filter shape-factor of less than 5, the N9340A has the ability to resolve close adjacent signals with unequal amplitudes.

Moreover, the narrow RBW means that the spectrum analyzer introduces minimal noise itself, helping to further reduce noise levels and improve DANL.



## Superior sensitivity

With more wireless devices on the market requiring greater bandwidth usage, the ability to discriminate between different signals becomes more challenging. It's under such demanding conditions that the superior performance of an N9340A analyzer proves its worth. The N9340A has one of the best sensitivity and selectivity specifications. The DANL is  $-124$  dBm with preamplifier off, or  $-144$  dBm with preamplifier (30 Hz RBW,  $10 \text{ MHz} < f_c \leq 1.5 \text{ GHz}$ ). The phase noise is  $-87$  dBc at 30 kHz offset.

An optional preamplifier with 20 dB gain further improves analyzer sensitivity.

## Speed at your fingertips

Spectrum bandwidth is a finite resource, therefore spectrum usage requires management. Most regulatory authorities responsible for administering frequency allocation require service suppliers and network operators to perform routine monitoring of signal power and transmission frequency stability.

An important application of spectrum analysis is identifying interfering signals. These often arise from illegal transmissions, and may cause impairment of services for authorized users, often resulting in financial loss.

It is possible, these interfering signals could restrict critical communications of civil aviation and emergency services, which could potentially jeopardize lives.

Some sources of interference are more intermittent than regular transmissions. Such spurious signals can be hard to eliminate because it is difficult to identify and isolate them.

With an impressively fast sweep – a minimum non-zero-span sweep time of 10 ms – an Agilent N9340A handheld spectrum analyzer increases the probability of you detecting and capturing spurious or transient signals.

## Applications

- **Aerospace and defence: military communications installation and maintenance**
- **Wireless service providers: wireless network installation and maintenance**
- **Microwave and satellite links maintenance**
- **TV and broadcasting**
- **Regulatory authority spectrum management**

### N9340A superior performance improves your productivity:

- **Fast sweep speed**
- **Superior sensitivity: lowest DANL**
- **Best resolution available**

# N9340A

Handheld  
Spectrum Analyzer

Get essential functionality  
and easy - to - use  
features right at your finger tips

## Safety at high input levels

The N9340A can be used for most cases. However, should the power level exceed 33 dBm, the input protection switch activates to protect the instrument from damage.

The maximum safe input level is > +33 dBm for 3 minutes at most (50 VDC maximum).


## One-button measurement

The Agilent N9340A supports one-button measurements of occupied bandwidth, channel power and adjacent channel power ratio. This virtually eliminates set-up time in the field.


## Occupied Bandwidth (OBW)

An occupied bandwidth measurement integrates the power of the displayed spectrum and puts one pair of vertical lines at the frequencies between which the interested signal is contained.

An N9340A spectrum analyzer supports two ways to measure the occupied bandwidth, in percentage or in dBc.

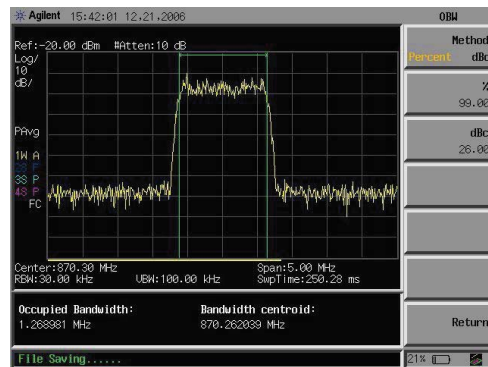


The occupied bandwidth is measured in percentage.

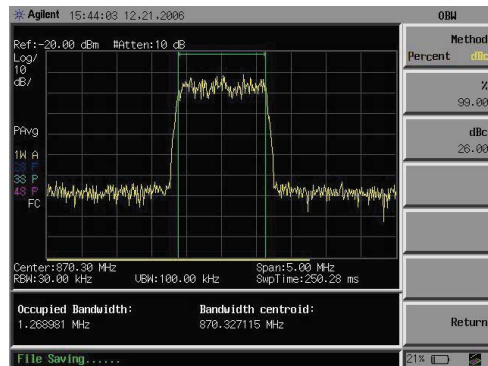

The occupied bandwidth is measured in dBc.

### Channel Power


Use channel power to measure both power and power spectral density in a user-specified channel bandwidth. One pair of vertical lines on the display indicates the edges of the channel bandwidth.

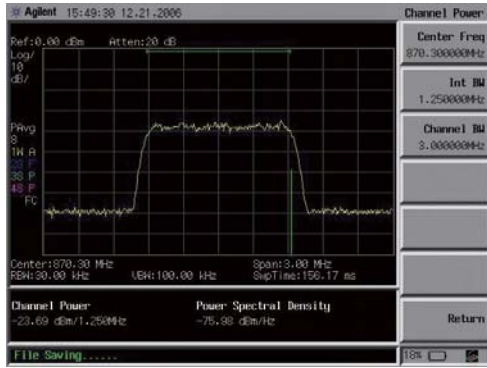

It is quick and easy to set center frequency, integration bandwidth, and channel bandwidth on the panel.

### Adjacent Channel Power Ratio (ACPR)

Wireless service providers need to minimize the interference caused by power leaking into adjacent transmit channels. Adjacent channel power ratio measurements help in the checking of signal spectrums and in identifying and controlling sources of interference.

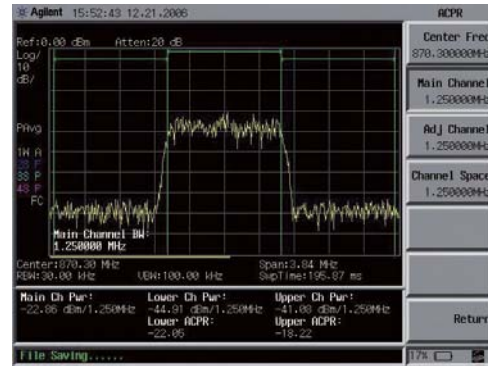

Center frequency, main channel bandwidth, adjacent channel bandwidth, and channel space can be set on the panel.

### **N9340A optimizes usability for field use:**

- **Long battery life**
- **Transflective LCD**
- **Modern USB connectivity**
- **Multi-language UI**
- **Rugged design for field use**



Simply gather measurement data in the field for later inclusion into reports in a PC environment. USB memory stick makes it easy to transfer files of stored screen shots, measurement data and settings. Then, generate edit and print the report at a more suitable time and location.

#### **Long battery life**

Testing in the field often means operating away from main power supplies. Batteries need to have the longest possible operating time before recharging. You'll find an Agilent N9340A analyzer has superior power management, providing an impressive 4-hour battery operating time.

It's easy to operate for an entire day in the field. There is an advanced, in-built battery management system. This helps provide a useful extended battery operating time of typically four hours: with just one battery and a spare, or a quick recharging from any vehicle using the supplied auto-lighter charger, you are able to operate for an entire day away from a mains power source.

#### **Tough enough for the military**

You will find that this Agilent analyzer is tough enough for military applications. Apart from its generally compact and rugged construction, the large rubberized grips wrap around both ends, providing additional robust protection from rough handling. The sealed keypad and screen are moisture resistant and dust proof. Of course, there is a protective carrying case that provides further security for your analyzer.

#### **Modern USB connectivity**

Detailed analysis of results in the field is not always convenient or possible. You will need to store the results for later investigation. Connecting to a PC is simple and data transfer is fast via the USB cable. In test lab and bench-top use, the USB interface and PC software also support PC remote control of Agilent's N9340A spectrum analyzer. This allows appropriate use of a large format PC screen. Windows®-compatible software provides automatic storage of selected data and graphics.

#### **Multi-language user interface**

Users around the world will find operating Agilent N9340A is easy. In addition to English, there are ten more user-selectable, on-screen languages, including Chinese, Japanese, Korean and a number of European languages (see Specifications – General).

#### **See scans clearly**

As with all the newest Agilent portable field testers, operating under challenging bright sunlight or other difficult natural lighting conditions is no problem. The larger than usual 7.2-inch (18.3 cm), transflective color LCD provides a superior high-resolution display with a clear, bright trace. There is no need to ensure you operate in the shade.



\* Windows is a U.S. registered trademark of the Microsoft Corporation.

# Specifications

Specifications apply under the following conditions:

- After a warm-up time of 30 minutes, and at least two hours of operation or storage at operating temperature
- Within a valid calibration period
- Data with no given tolerances are typical values only. Data designated as 'typical' is not covered by the product warranty.

Supplemental information

## Frequency

### Frequency

**Frequency range :** 100 kHz to 3 GHz (tunable to 9 kHz) AC coupled

### Internal 10 MHz frequency reference accuracy

**Aging rate :**  $\pm 1$  ppm / year  
**Temperature stability :**  $\pm 2$  ppm 0 °C to 30 °C, 30 °C to 50 °C in addition +2 ppm / 10 °C

### Frequency readout accuracy with market (Start, stop, center, marker)

**Marker resolution :** ( frequency span ) / ( number of sweep points – 1 )  
**Uncertainty :**  $\pm$  ( frequency indication  $\times$  frequency reference uncertainty  
+1%  $\times$  span + 20%  $\times$  resolution bandwidth + marker  
resolution+1 Hz)

Frequency reference uncertainty = (aging rate  $\times$  period of time since adjustment + temperature stability )

### Marker frequency counter

**Resolution:** 1 Hz  
**Accuracy:**  $\pm$  (marker frequency  $\times$  frequency reference  
uncertainty + Counter resolution) RBW/ span  $\geq 0.02$ ; marker level to displayed  
Noise level > 25 dB; frequency offset 0 Hz

Frequency reference error = (aging rate  $\times$  period of time since adjustment + temperature stability )

### Frequency span

**Range :** 0 Hz (zero span), 1 kHz to 3 GHz  
**Resolution :** 1 Hz  
**Accuracy :**  $\pm$  span / ( sweep points – 1 )

### SSB phase noise

**Carrier offset :**  
30 kHz  $< -87$  dBc (1 Hz) 20 °C to 30 °C; *Typical*  
100 kHz  $< -100$  dBc (1 Hz)  $f_c = 1$  GHz; RBW 100 Hz; VBW 10 Hz; RMS detector  
1 MHz  $< -120$  dBc (1 Hz)

### Resolution bandwidth (RBW)

**- 3 dB bandwidth :** 30 Hz to 1 MHz 1- 3 - 10 sequence  
**Accuracy :**  $\pm 5\%$  *Nominal*  
**Resolution filter shape factor :**  $< 5 : 1$  60 dB / 3 dB bandwidth ratio; *Nominal*;  
Digital, approximately Gaussian shape

### Video bandwidth (VBW)

**- 3 dB bandwidth :** 3 Hz to 1 MHz 1- 3 - 10 sequence  
**Accuracy :**  $\pm 5\%$  *Nominal*

## Amplitude

### Measurement range

Displayed average noise level (DANL) to +20 dBm  
**Input attenuator range:** 0 to 51 dB, in 1 dB steps

### Maximum safe input level

<b>Average continuous power :</b>	$\geq +33$ dBm; 3 minutes maximum. <i>Normal</i>	Input attenuator setting $\geq 20$ dB (input protection switch active when input level $> 33$ dBm)
<b>DC voltage :</b>	50 VDC maximum	

### Displayed average noise level

<b>Preamp off :</b>		Reference level $\leq -50$ dBm
100 kHz $< f_c \leq 1$ MHz	$< -90$ dBm	
1 MHz $< f_c \leq 10$ MHz	$< -110$ dBm	
$f_c = 50$ MHz	$-126$ dBm ( <i>Typical</i> )	
10 MHz $< f_c \leq 1.5$ GHz	$< -124$ dBm	
1.5 GHz $< f_c \leq 3$ GHz	$< -117$ dBm	
<b>Preamp on :</b>		Reference level $\leq -70$ dBm
100 kHz $< f_c \leq 1$ MHz	$< -115$ dBm	
1 MHz $< f_c \leq 10$ MHz	$< -128$ dBm	
$f_c = 50$ MHz	$-146$ dBm ( <i>Typical</i> )	
10 MHz $< f_c \leq 1.5$ GHz	$< -144$ dBm	
1.5 GHz $< f_c \leq 3$ GHz	$< -136$ dBm	

RBW = 30 Hz; VBW = 3 Hz; input terminated 50 ohm; 0 dB attenuation; RMS detector; Trace average  $\geq 40$

### Level display range

<b>Log scale and units :</b>	10 to 100 dB; ten divisions displayed; 1, 2, 5, 10 dB/ division. dBm, dBmV, dB $\mu$ V	
<b>Linear scale and units :</b>	0 to 100% ; ten divisions displayed. V, $\mu$ A, mW, W	
<b>Sweep (Trace) points :</b>	461	
<b>Marker level readout resolution :</b>		
Log scale	0.01 dB	
Linear scale	0.01% of reference level	
<b>Detectors :</b>	Normal, Positive Peak, Sample, Negative Peak, Log Power Average, RMS Average, Voltage Average.	
<b>Number of traces :</b>	4	
<b>Trace functions :</b>	Clear / write; maximum hold; average;	
<b>Level measurement error :</b>	$\pm 1.5$ dB (excluding input VSWR mismatch) 0.5 dB, <i>Typical</i>	20 to 30 °C, peak detector, preamplifier off, input signal 0 dBm to $-50$ dBm, 20 dB input attenuation, frequency $> 1$ MHz, auto sweep time, RBW = 1 kHz, VBW = 1 kHz, trace average on to reduce noise

### Reference level

<b>Setting range :</b>	$-100$ to $+20$ dBm	Steps of 1 dB
<b>Setting resolution :</b>		
Log scale	0.1 dB	
Linear scale	1% of reference level	
<b>Accuracy :</b>	0	Because reference level affects only the display not the measurement, it causes no additional error in measurement results from trace data markers



## RF Input VSWR ( at tuned frequency )

Attenuator setting 0 dB	< 1.8 : 1	10 MHz to 3.0 GHz, <i>Nominal</i>
Attenuator setting 10 dB	< 1.8 : 1	100 kHz to 10 MHz, <i>Nominal</i>
	< 1.5 : 1	10 MHz to 2.5 GHz, <i>Typical</i>
	< 1.8 : 1	2.5 GHz to 3.0 GHz, <i>Typical</i>
Attenuator setting 20 dB	< 1.6 : 1	100 kHz to 10 MHz, <i>Nominal</i>
	< 1.4 : 1	10 MHz to 3.0 GHz, <i>Typical</i>

## Spurious response

<b>Second harmonic distortion :</b> ( second harmonic intercept )	< -70 dBc	Mixer level = -40 dBm
<b>Third - order intermodulation :</b> ( third order intercept )	+ 10 dBm, <i>Typical</i>	Third-order intermodulation products; 2 x -20 dBm; reference level -10 dBm; center frequency 300 MHz; frequency separation 200 kHz
<b>Input related spurious :</b>	< -70 dBc	-40 dBm signal at input mixer, carry offset > 1 MHz.
<b>Inherent residual response :</b>	< -88 dBm	Input terminated and 0 dB RF attenuation, preamplifier off, reference level -30 dBm, f > 30 MHz, RBW ≤ 10 kHz

## Sweep

### Sweep time

<b>Range :</b>	10 ms to 1000 s 6 μs to 200 s	Span ≥ 1 kHz Span = 0 Hz ( zero span )
<b>Sweep mode :</b>	Continuous; single	
<b>Trigger source :</b>	Free run; video; external	
<b>Trigger slope :</b>	Selectable positive or negative edge	
<b>Trigger delay :</b>		
Range	6 μs to 200 s	
Resolution	6 μs	

## Front panel input / output

### RF input

<b>Connector and impedance :</b>	Type -N female; 50 Ω	<i>Nominal</i>
<b>VSWR :</b>	< 1.5 : 1	10 MHz to 3.0 GHz, input attenuator ≥ 10 dB

### 10 MHz reference / External trigger input

<b>Reference input frequency :</b>	10 MHz	
<b>Reference input amplitude :</b>	0 to + 10 dBm	
<b>Trigger voltage :</b>	5 V TTL level ( 12.6 V, 150 mA maximum )	<i>Nominal</i>
<b>Connector and output impedance :</b>	BNC female; 50 Ω	<i>Nominal</i>

### USB interface

<b>Host connector and protocol :</b>	A plug; Version 1.1
<b>Device connector and protocol :</b>	AB plug; Version 1.1

## General

### Display

<b>Resolution :</b>	640 x 480 pixels
<b>Size and type :</b>	7.2 inch ( 183 mm ) STN transfective; color display

### Languages

<b>On-Screen GUI :</b>	English, Simplified Chinese, Traditional Chinese, French, German, Italian, Japanese, Korean, Russian, Spanish, Portuguese.
------------------------	--

### Power requirements and calibration

<b>Voltage :</b>	90 to 120 or 195 to 263 VAC; 47 to 63 Hz 12 to 18 VDC; < 25 W	Auto-ranging
<b>Power consumption :</b>	12 W	<i>Typical</i>
<b>Battery :</b>		
Operating time ( fully charged battery )	4 hours 3 hours	Tracking generator off Tracking generator on
Charging time	3 hours	
Life time	300 to 500 charge cycles	
<b>Warm-up time :</b>	30 minutes	
<b>Calibration cycle :</b>	One year	

### Environmental and size

<b>Temperature range :</b>	- 10 to + 50 °C - 40 to + 70 °C	Operating ( Battery: 0 to 50 °C ) Storage ( Battery: -20 to 50 °C )
<b>Relative humidity :</b>	< 95%	
<b>Weight :</b>	3 kg ( 6.6 lb )	Net (shipping) approximately; ( 3.5 kg with battery)
<b>Dimensions :</b>	318 × 207 × 69 mm	Approximately ( W x H x D)

## Options

### RF preamplifier ( Option PA3 )

<b>Frequency range :</b>	1 MHz to 3 GHz	
<b>Gain :</b>	20 dB	<i>Nominal</i>

### Tracking generator (Option TG3 )

<b>Frequency range :</b>	5 MHz to 3 GHz	
<b>Output level :</b>	0 to -25 dB	1 dB steps
<b>Output flatness :</b>	± 3 dB	Referenced to 50 MHz, 0 dBm
<b>VSWR :</b>	< 2.0 : 1	<i>Nominal</i>
<b>Connector and impedance :</b>	Type-N female; 50Ω	<i>Nominal</i>

## Ordering Information

Model number	Description
--------------	-------------

---

**N9340A handheld spectrum analyzer 100 kHz to 3.0 GHz**

*Accessories supplied as standard with each*

- Multi-language Quick Start Tutorial
  - CD-ROM of the manual
  - Soft carrying case
- 

### Options

N9340A-PA3	3 GHz preamplifier
N9340A-TG3	3 GHz tracking generator
N9340A-1TC	Hard transit case
N9340A-1DC	Automotive 12 VDC adaptor
N9340A-BAT	Spare battery pack
N9340A-ADP	Spare AC/DC adaptor
N9340A-ABA	Manual – English
N9340A-AB2	Manual – Chinese
N9340A-ABJ	Manual – Japanese

---

### Warranty and service

Standard warranty is one year.

R-51B-001-3C 1 year Return-to-Agilent warranty extended to 3 years

---

### Calibration

R-50C-001-3 Agilent Calibration Upfront Support Plan  
3 year coverage



Hard transit case  
N9340A-1TC



Soft carrying case



Spare AC/DC adaptor

 **Agilent Email Updates**

[www.agilent.com/find/emailupdates](http://www.agilent.com/find/emailupdates)

Get the latest information on the products and applications you select.



[www.agilent.com/find/open](http://www.agilent.com/find/open)

Agilent Open simplifies the process of connecting and programming test systems to help engineers design, validate and manufacture electronic products. Agilent offers open connectivity for a broad range of system-ready instruments, open industry software, PC-standard I/O and global support, which are combined to more easily integrate test system development.

## Remove all doubt

Our repair and calibration services will get your equipment back to you, performing like new, when promised. You will get full value out of your Agilent equipment throughout its lifetime. Your equipment will be serviced by Agilent-trained technicians using the latest factory calibration procedures, automated repair diagnostics and genuine parts. You will always have the utmost confidence in your measurements.

Agilent offers a wide range of additional expert test and measurement services for your equipment, including initial start-up assistance onsite education and training, as well as design, system integration, and project management.

For more information on repair and calibration services, go to

[www.agilent.com/find/removealldoubt](http://www.agilent.com/find/removealldoubt)

## www.agilent.com

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

### Phone or Fax

#### United States:

(tel) 800 829 4444  
(fax) 800 829 4433

#### Canada:

(tel) 877 894 4414  
(fax) 800 746 4866

#### China:

(tel) 800 810 0189  
(fax) 800 820 2816

#### Europe:

(tel) 31 20 547 2111

#### Japan:

(tel) (81) 426 56 7832  
(fax) (81) 426 56 7840

#### Korea:

(tel) (080) 769 0800  
(fax) (080) 769 0900

#### Latin America:

(tel) (305) 269 7500

#### Taiwan:

(tel) 0800 047 866  
(fax) 0800 286 331

#### Other Asia Pacific Countries:

(tel) (65) 6375 8100  
(fax) (65) 6755 0042  
Email: [tm\\_ap@agilent.com](mailto:tm_ap@agilent.com)

Revised: 11/08/06

Product specifications and descriptions in this document subject to change without notice.

Microsoft and Windows are U.S. registered trademarks of Microsoft Corporation.

© Agilent Technologies, Inc. 2007  
Printed in USA, February 1, 2007  
5989-5971EN



**Agilent Technologies**