

Agilent 4395A

Network/Spectrum/Impedance Analyzer

Data Sheet

Network Measurement

Specifications describe the instrument's warranted performance over the temperature range of 0 °C to 40 °C (except as noted). Supplemental characteristics are intended to provide information that is useful in applying the instrument by giving non-warranted performance parameters. These are denoted as *SPC* (*supplemental performance characteristics*), *typical*, or *nominal*. Warm up time must be greater than or equal to 30 minutes after power on for all specifications.

Source characteristics

Frequency characteristics (Option 4395A-800)

Range 10 Hz to 500 MHz

Resolution 1 mHz

Frequency reference

Accuracy

at 23 °C ± 5 °C, referenced to 23 °C < ±5.5 ppm

Aging < ±2.5 ppm/year (SPC)

Initial achievable accuracy < ± 1.0 ppm (SPC)

Temperature stability

at 23 °C ± 5 °C, referenced to 23 °C < ±2ppm (SPC)

Precision frequency reference (Option 4395A-1D5)

Accuracy

at 0 °C to 40 °C, referenced to 23 °C < ±0.13 ppm

Aging < ±0.1 ppm/year (SPC)

Initial achievable accuracy < ±0.02 ppm (SPC)

Temperature stability

at 0 °C to 40 °C, referenced to 23 °C < ±0.01 ppm (SPC)

Output characteristics

Power range -50 dBm to + 15 dBm

Level accuracy

at 0 dBm output, 50 MHz, 23 °C ± 5 °C, ±1.0 dB

Level linearity

| Output power | Linearity ¹ |
|--------------|------------------------|
| ≥ -40 dBm | ±1.0 dB |
| < -40 dBm | ±1.5 dB |

1. At relative to 0 dBm output, 50 MHz,
23 °C ± 5 °C



Agilent Technologies

Network Measurement

continued

| | | |
|---|-------|---------------------|
| Flatness | | |
| at 0 dBm output, relative to 50 MHz, $23^{\circ}\text{C} \pm 5^{\circ}\text{C}$ | | $\pm 2\text{ dB}$ |
| Resolution | | 0.1 dB |
| Spectral purity characteristics | | |
| Harmonics | | |
| at +10 dBm output | | < -30 dBc |
| Non-harmonics spurious | | |
| at +10 dBm output | | < -30 dBc |
| Noise sidebands | | |
| at $\geq 10\text{ kHz}$ offset from carrier | | < -95 dBc/Hz |
| Power sweep range | | 20 dB max. |
| Power sweep linearity | | |
| deviation from linear power referenced to the stop power level | | $\pm 0.5\text{ dB}$ |
| Impedance | | 50 Ω nominal |
| Return loss | | |
| frequency $\leq 200\text{ MHz}$ | | > 15 dB (SPC) |
| frequency $> 200\text{ MHz}$ | | > 7dB (SPC) |
| Connector | | Type N female |

Receiver Characteristics

Input characteristics

Frequency range 10 Hz to 500 MHz

Input attenuator 0 to 50 dB, 10 dB step

Full scale input level (R, A, B)

| Attenuator setting (dB) | Full scale input level |
|-------------------------|------------------------|
|-------------------------|------------------------|

| | |
|----|---------|
| 0 | -10 dBm |
| 10 | 0 dBm |
| 20 | +10 dBm |
| 30 | +20 dBm |
| 40 | +30 dBm |
| 50 | +30 dBm |

IF bandwidth (IFBW) 2, 10, 30, 100, 300, 1 k, 3 k, 10 k, 30 kHz

Note: The IFBW should be set to less than 1/5 of the lowest frequency in the sweep range.

Noise level (referenced to full scale input level, 23 °C ± 5 °C)

at 10 Hz ≤ frequency < 100 Hz, IFBW = 2 Hz -85 dB (SPC)

at 100 Hz ≤ frequency < 100 kHz, IFBW = 10 Hz -85 dB

at 100 kHz ≤ frequency, IFBW = 10 Hz (-115 + f/100 MHz) dB

Input crosstalk

for input R + 10 dBm input, input attenuator: 20 dB

for input A, B input attenuator: 0 dB

0 dB

at < 100 kHz

R through A, B < -100 dB

others < -100 dB (SPC)

at ≥ 100 kHz

R through A, B < -120 dB

others < -120 dB (SPC)

Source crosstalk (for input A, B)(typical for input R)

at + 10 dBm output, < 100 kHz, input attenuator: 0 dB < -100 dB

at + 10 dBm output, ≥ 100 kHz, input attenuator: 0 dB < -120 dB

Multiplexer switching impedance change

at input attenuator 0 dB < 0.5% (SPC)

at input attenuator 10 dB and above < 0.1% (SPC)

Connector Type-N female

Impedance 50 Ω nominal

Return loss

Input attenuator

| 0 dB | 10 dB | 20 dB to 50 dB |
|------|-------|----------------|
|------|-------|----------------|

10 Hz ≤ frequency < 100 kHz 25 dB¹

100 dB 25 dB¹

100 kHz ≤ frequency ≤ 100 MHz 25 dB¹

100 MHz < frequency 15 dB¹

15 dB 15 dB

15 dB 15 dB

Maximum input level +30 dBm (at input attenuator: 40 dB or 50 dB)

Maximum safe input level +30 dBm or ±7 Vdc (SPC)

1. SPC

Magnitude Characteristics

Absolute amplitude accuracy (R, A, B)

at -10 dBm input, input attenuator:
 10 dB , frequency $\geq 100 \text{ Hz}$, IFBW $\leq 3 \text{ kHz}$, $23^\circ\text{C} \pm 5^\circ\text{C}$ $< \pm 1.5 \text{ dB}$

Ratio accuracy (A/R, B/R) (typical for A/B)

at -10 dBm input, input attenuator:
 10 dB , IFBW $\leq 3 \text{ kHz}$, $23^\circ\text{C} \pm 5^\circ\text{C}$ $< \pm 2 \text{ dB}$

Dynamic accuracy (A/R, B/R) (typical for A/B)

| Input level (relative to full scale input level) | Dynamic accuracy ¹ frequency $\geq 100 \text{ Hz}$ |
|--|--|
| $0 \text{ dB} \geq \text{input level} > -10 \text{ dB}$ | $\pm 0.4 \text{ dB}$ |
| $-10 \text{ dB} \geq \text{input Level} \geq -60 \text{ dB}$ | $\pm 0.05 \text{ dB}$ |
| $-60 \text{ dB} > \text{input level} \geq -80 \text{ dB}$ | $\pm 0.3 \text{ dB}$ |
| $-80 \text{ dB} > \text{input level} \geq -100 \text{ dB}$ | $\pm 3 \text{ dB}$ |

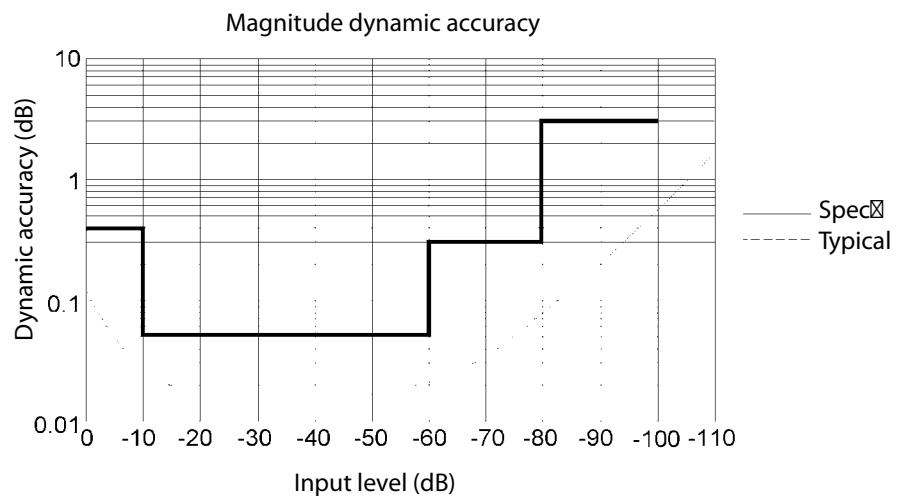


Figure 1-1. Magnitude dynamic accuracy

Residual responses $< -80 \text{ dB}$ full scale (SPC)

Trace noise (A/R, B/R, A/B)

at 50 MHz , both inputs:
full scale input level -10 dB , IFBW = 300 Hz $< 0.005 \text{ dB rms}$ (SPC)

Stability (A/R, B/R, A/B) $< \pm 0.01 \text{ dB}/^\circ\text{C}$ (SPC)

Phase characteristics

Measurements format Standard format, expanded phase format

Frequency response (deviation from linear phase) (A/R, B/R) (SPC for A/B)
at -10 dBm input, input attenuator: 10 dB , IFBW $\leq 3 \text{ kHz}$, $23^\circ\text{C} \pm 5^\circ\text{C}$ $< \pm 12^\circ$

Dynamic accuracy (A/R, B/R) (SPC for A/B)

| Input level (relative to full scale input level) | Dynamic accuracy ¹ frequency $\geq 100 \text{ Hz}$ |
|--|--|
| $0 \text{ dB} \geq \text{input level} > -10 \text{ dB}$ | $\pm 3^\circ$ |
| $-10 \text{ dB} \geq \text{input Level} \geq -60 \text{ dB}$ | $\pm 0.3^\circ$ |
| $-60 \text{ dB} > \text{input level} \geq -80 \text{ dB}$ | $\pm 1.8^\circ$ |
| $-80 \text{ dB} > \text{input level} \geq -100 \text{ dB}$ | $\pm 18^\circ$ |

1. R input level (B input level for A/B) = full scale input level -10 dB , IFBW = 10 Hz , $23^\circ\text{C} \pm 5^\circ\text{C}$

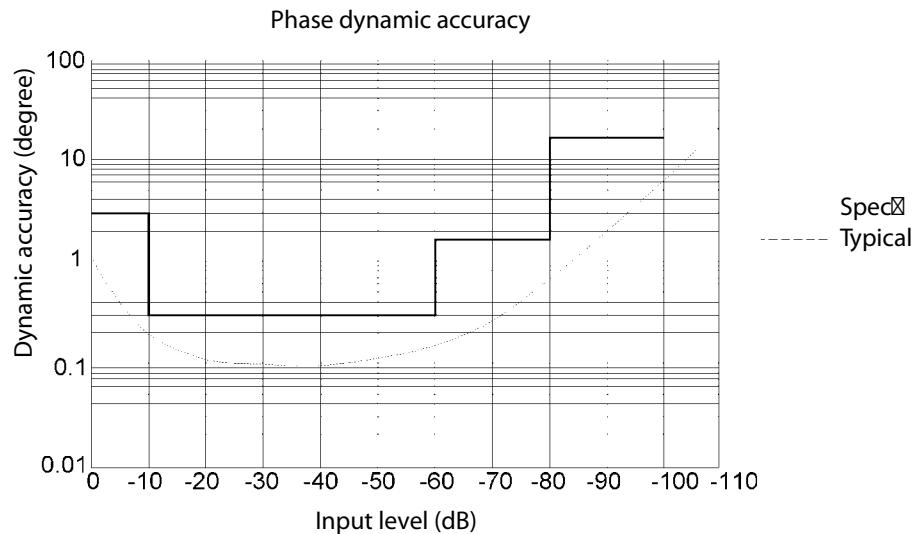


Figure 1-2. Phase dynamic accuracy

Trace noise (A/R, B/R, A/B)

at 50 MHz, both inputs:

full scale input level -10 dB, IFBW = 300 Hz < 0.04° rms (SPC)

Stability (A/R, B/R, A/B) < ±0.1 °/°C (SPC)

Group delay characteristics

Aperture [Hz] 0.25% to 20% of span

Accuracy

In general, the following formula can be used to determine the accuracy, in seconds, of a specific group delay measurement:

$$\frac{\text{Phase accuracy (degree)}}{\text{Aperture(Hz)} \times 360 \text{ (degree)}}$$

Sweep characteristics

Sweep type Linear frequency, log frequency, power, list frequency

Sweep direction Upper direction only

Trigger type Hold, single, number of groups, continuous

Trigger source Internal (free run), external, manual, GPIB (bus)

Event trigger On point, on sweep

Spectrum Measurement

Frequency characteristics

Frequency range 10 Hz to 500 MHz

Frequency readout accuracy
 $\pm((freq\ readout[Hz]) \times (freq\ ref\ accuracy[1]) + RBW[Hz] + \frac{SPAN[Hz]}{NOP-1}) [Hz]$
 where NOP means number of display points

Frequency reference (Option 4395A-800)

Accuracy

at $23^{\circ}\text{C} \pm 5^{\circ}\text{C}$, referenced to 23°C $< \pm 5.5 \text{ ppm}$

Aging $< \pm 2.5 \text{ ppm/year (SPC)}$

Initial achievable accuracy $< \pm 1.0 \text{ ppm (SPC)}$

Temperature stability

at $23^{\circ}\text{C} \pm 5^{\circ}\text{C}$, referenced to 23°C $< \pm 2 \text{ ppm (SPC)}$

Precision frequency reference (Option 4395A-1D5)

Accuracy

at 0°C to 40°C , referenced to 23°C $< \pm 0.13 \text{ ppm}$

Aging $< \pm 0.1 \text{ ppm/year (SPC)}$

Initial achievable accuracy $< \pm 0.02 \text{ ppm (SPC)}$

Temperature stability

at 0°C to 40°C , referenced to 23°C $< \pm 0.01 \text{ ppm (SPC)}$

Resolution bandwidth (RBW)

Range

3 dB RBW at span > 0 1 Hz to 1 MHz, 1-3 step

3 dB RBW at span = 0
 3 k, 5 k, 10 k, 20 k, 40 k, 100 k, 200 k, 400 k, 800 k, 1.5 M, 3 M, 5 MHz

Selectivity (60 dB BW/3 dB BW)

at span > 0 < 3

Mode Auto or manual

Accuracy

at span > 0 $< \pm 10\%$

at span = 0 $< \pm 30\%$

Video bandwidth (VBW)

Range

at span > 0 3 MHz to 3 MHz, 1-3 step, $0.003 \leq \text{VBW}/\text{RBW} \leq 1$

Noise sidebands

Offset from carrier

$\geq 1 \text{ kHz}$ $< -95 \text{ dBc/Hz}$

$\geq 100 \text{ kHz}$ $< -108 \text{ dBc/Hz}$

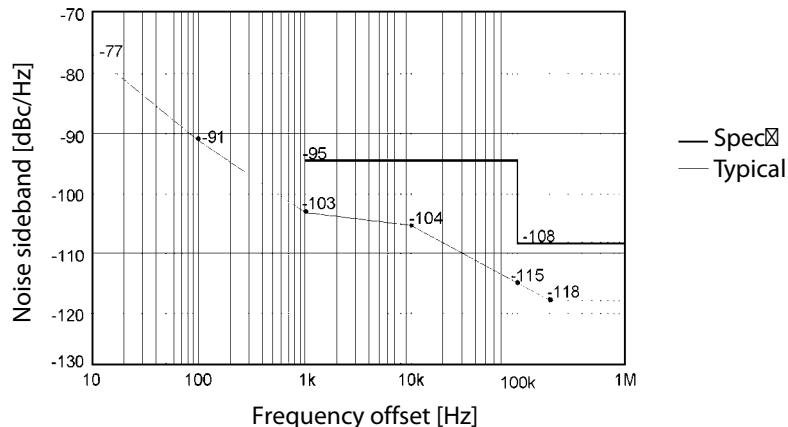


Figure 1-3. Noise sidebands

Amplitude Characteristics

| | |
|---------------------------------------|---|
| Amplitude range | displayed average noise level to +30 dBm |
| Reference value setting range | -100 dBm to +30 dBm |
| Level accuracy | at -20 dBm input, 50 MHz, input attenuator: 10 dB, $23^{\circ}\text{C} \pm 5^{\circ}\text{C}$ $< \pm 0.8\text{ dB}$ |
| Frequency response | at -20 dBm input, input attenuator: 10 dB, referenced to level at 50 MHz, $23^{\circ}\text{C} \pm 5^{\circ}\text{C}$ |
| frequency $\geq 100\text{ Hz}$ | $< \pm 1.5\text{ dB}$ |
| frequency $< 100\text{ Hz}$ | $< \pm 1.3\text{ dB}$ |
| Amplitude fidelity¹ | |
| Log scale² | |

| Range (dB to reference input lever [dB]) | Amplitude fidelity [dB] |
|---|----------------------------|
| 0 to -30 | ± 0.05 |
| -30 to -40 | ± 0.07 |
| -40 to -50 | ± 0.15 |
| -50 to -60 | ± 0.35 |
| -60 to -70 | ± 0.8 |
| -70 to -80 | ± 1.8 |

| | |
|---------------------------------|-------------------|
| Linear scale² | $< \pm 3\%$ |
|---------------------------------|-------------------|

Displayed average noise level

| | |
|---|--|
| at reference value $\leq -40\text{ dBm}$, input attenuator: auto or 0 dB | -120 dBm/Hz |
| at frequency $\geq 1\text{ kHz}$ | -120 dBm/Hz |
| at $\geq 100\text{ kHz}$ | -133 dBm/Hz |
| at $\geq 10\text{ MHz}$ | $(-145 + \text{frequency}/100\text{ MHz})\text{ dBm/Hz}^3$ |

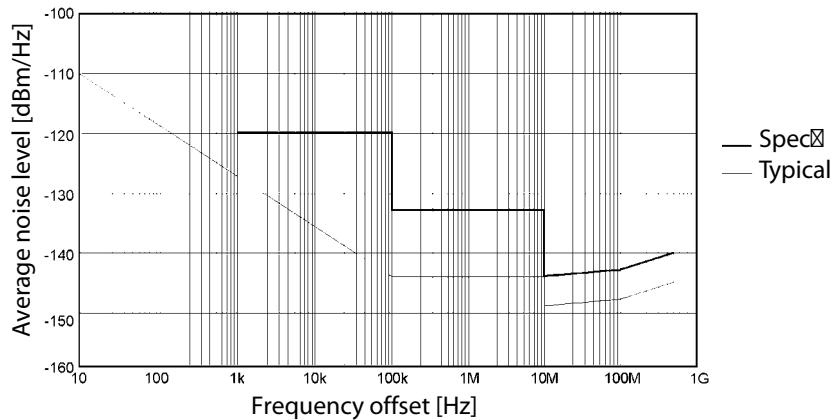


Figure 1-4. Typical displayed average noise level

1. Fidelity shows an extent of nonlinearity referenced to the reference input level.
2. RBW = 10 Hz, $-20\text{ dBm} \leq$ reference value $\leq +30\text{ dBm}$, reference input level = full scale input level -10 dB , $23 \pm 5^{\circ}\text{C}$
3. At start frequency $\geq 10\text{ MHz}$

Note: Refer to Input attenuator part for the definition of full scale input level.

On-screen Dynamic Range

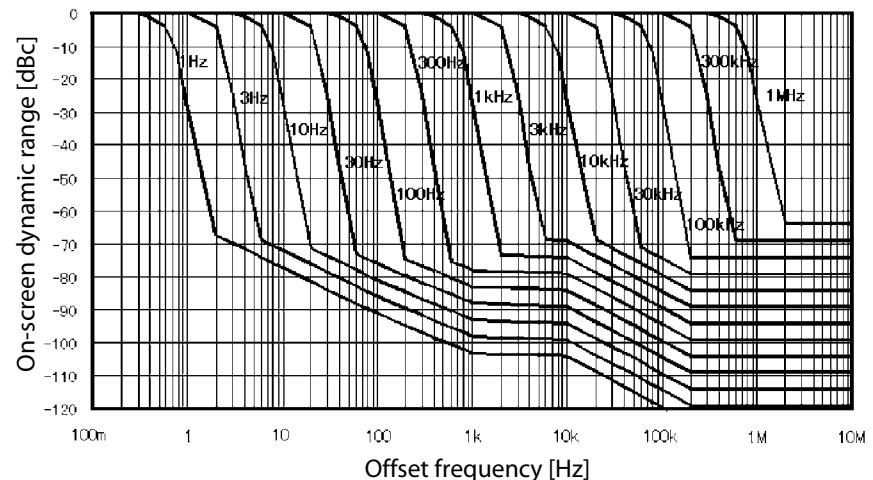


Figure 1-5. Typical on-screen dynamic range (center: 100 MHz)

Spurious responses

Second harmonic distortion

at single tone input with full scale input level -10 dB , input signal frequency $\geq 100 \text{ kHz}$
 $\dots < -70 \text{ dBc}, < -75 \text{ dBc} (\text{SPC})$

Third order inter-modulation distortion

at two tones input with full scale input level -16 dB , separation $\geq 100 \text{ kHz}$
 $\dots < -75 \text{ dBc}, < 80 \text{ dBc} (\text{SPC})$

Spurious

at single tone input with full scale input level -10 dB , input signal frequency $\leq 500 \text{ MHz}$
 $\dots < -75 \text{ dBc}$

except for the following frequency ranges:

$5.6 \text{ MHz} \pm 1 \text{ MHz}, 30.6 \text{ MHz} \pm 1 \text{ MHz}, 415.3 \text{ MHz} \pm 1 \text{ MHz}$

Residual response

at reference value setting $\leq -40 \text{ dBm}$, input attenuator: auto or 0 dB $< -110 \text{ dBm}$

Typical Dynamic Range

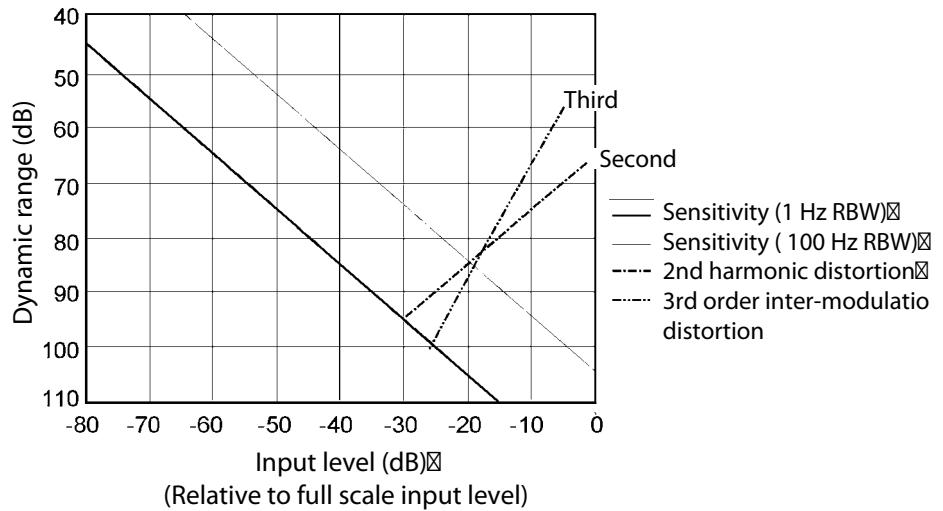


Figure 1-6. Typical dynamic range at inputs R, A, and B

Input attenuator

Setting range 0 dB to 50 dB, 10 dB step

| Attenuator setting (dB) | Full scale input level |
|-------------------------|------------------------|
| 0 | -20 dBm |
| 10 | -10 dBm |
| 20 | 0 dBm |
| 30 | +10 dBm |
| 40 | +20 dBm |
| 50 | +30 dBm |

Mode

(In auto mode, the attenuator is set to 20 dB above the reference value; this ensures that the maximum signal level after the attenuator will not be greater than -20 dBm.)

Input attenuator switching uncertainty

at attenuator: ≤ 30 dB, referenced to 10 dB $< \pm 1.0$ dB
at attenuator: ≥ 40 dB, referenced to 10 dB $< \pm 1.5$ dB

Temperature drift $< \pm 0.05$ dB/ $^{\circ}$ C (SPC)

Scale

Log 0.1 dB/div to 20 dB/div

Linear

at watt 1.0×10^{-12} W/div
at volt 1.0×10^{-9} V/div

Measurement format Spectrum or noise (/Hz)

Display unit dBm (unit of marker: dBm, dBV, dB μ V, V, W)

Sweep characteristics

Sweep type Linear, list

Trigger type Hold, single, number of groups, continuous

Trigger source Internal (free run), external, manual, level gate, edge gate, GPIB (bus)

Sweep time (excluding each sweep setup time)

| RBW | SPAN | Typical sweep time |
|---------|-----------|--------------------|
| 1 MHz | 500 MHz | 190 ms |
| 100 kHz | 100 MHz | 300 ms |
| 10 kHz | 10 MHz | 240 ms |
| 1 kHz | 1 MHz | 190 ms |
| 100 Hz | 100 kHz | 270 ms |
| 10 Hz | 10 kHz | 2.0 s |
| 1 Hz | 1 kHz | 11 s |
| — | Zero Span | — ¹ |

1. See the next item for sweep time at zero span

Zero span

| RBW | Minimum resolution | Maximum sweep time |
|------------|---------------------------|---------------------------|
| 5 MHz | 40 ns | 1.28 ms |
| 100 kHz | 1.28 μ s | 81.92 ms |
| 3 kHz | 40.96 μ s | 2.62 s |

Number of display points

- at span > 0 2 to 801 points (automatically set)
 at span = 0 2 to 801 points (selectable)

Input characteristics

Input port R, A, B

Crosstalk

from any input to other inputs, at the same input attenuator settings < -100 dB (SPC)

Connector Type N female

Impedance 50 Ω nominal

Return loss

| | Input attenuator | | |
|---|-------------------------|--------------------|-----------------------|
| | 0 dB | 10 dB | 20 dB to 50 dB |
| 10 Hz \leq frequency < 100 kHz | 25 dB ¹ | 25 dB ¹ | 25 dB ¹ |
| 100 kHz \leq frequency \leq 100 MHz | 25 dB ¹ | 25 dB | 25 dB ¹ |
| 100 MHz < frequency | 15 dB ¹ | 15 dB | 15 dB ¹ |

Input level +30 dBm max. at input attenuator: 50 dB

Maximum safe input level +30 dBm or ± 7 Vdc (SPC)

Specifications when Option 4395A-1D6 Time-Gated Spectrum Analysis is Installed

All specifications are identical to the standard Agilent 4395A except the following items.

| | | |
|--|-------------------|-----------------------------------|
| Gate length | | |
| Range | | 6 µs to 3.2 s |
| Resolution | | |
| Range of gate length (T_g) | Resolution | |
| 6 µs ≤ T_g ≤ 25 ms | 0.4 µs | |
| 25 ms < T_g ≤ 64 ms | 1 µs | |
| 64 ms < T_g ≤ 130 ms | 2 µs | |
| 130 ms < T_g ≤ 320 ms | 5 µs | |
| 320 ms < T_g ≤ 1.28 s | 20 µs | |
| 1.28 s < T_g ≤ 3.2 s | 100 µs | |
| Gate length | | |
| Range | | 2 µs to 3.2 s |
| Resolution | | |
| Range of gate delay (T_d) | Resolution | |
| 2 µs ≤ T_d ≤ 25 ms | 0.4 µs | |
| 25 ms < T_d ≤ 64 ms | 1 µs | |
| 64 ms < T_d ≤ 130 ms | 2 µs | |
| 130 ms < T_d ≤ 320 ms | 5 µs | |
| 320 ms < T_d ≤ 1.28 s | 20 µs | |
| 1.28 s < T_d ≤ 3.2 s | 100 µs | |
| Additional amplitude error | | |
| Log scale | | < 0.3 dB (SPC) |
| Linear scale | | < 3% (SPC) |
| Gate control modes | | Edge (positive/negative) or level |
| Gate trigger input (external trigger input is used) | | |
| Connector | | BNC female |
| Level | | TTL |
| Gate output | | |
| Connector | | BNC female |
| Level | | TTL |

Option 4395A-010

Impedance measurement

The following specifications are applied when the 43961A impedance test kit is connected to the 4395A.

Measurement functions

Measurement parameters

Z, Y, L, C, Q, R, X, G, B, θ

Display parameters

|Z|, |Y|, |L|, |C|, |Q|, |R|, |X|, |G|, |B|, |θ|, |Γ|, |Γ_x|, |Γ_y|, |Γ_x'|, |Γ_y'|, |C_p|, |C_s|, |L_p|, |L_s|, |R_p|, |R_s|, |D|, |Q|

Display formats

- Vertical lin/log scale
- Complex plane
- Polar/Smith/admittance chart

Sweep parameters

- Linear frequency sweep
- Logarithmic frequency sweep
- List frequency sweep
- Power sweep (in dBm unit)

IF bandwidth

- 2,10, 30, 100, 300, 1k, 3k, 10k, 30k [Hz]

Calibration

- OPEN/SHORT/LOAD 3 term calibration
- Fixture compensation
- Port extension correction

Measurement port type

- 7-mm

Output characteristics

Frequency range 100 kHz to 500 MHz

Frequency resolution 1 MHz

Output impedance 50 Ω nominal

Output level

when the measurement port is terminated by 50 Ω¹ -56 to +9 dBm

when the measurement port is open 0.71 mVrms to 1.26 Vrms

Resolution 0.1 dBm

Level accuracy ± (A + B + 6 × F/(1.8 × 10⁹))dB

Where

A = 2 dB

B = 0 dB (at 0 dBm ≤ P ≤ +15 dBm)

or B = 1 dB (at -40 dBm ≤ P < 0 dBm)

or B = 2 dB (at -50 dBm ≤ P < -40 dBm)

F is setting frequency [Hz], P is output power setting

1. When the measurement port is terminated with 50 Ω, the signal level at the measurement port is 6 dB lower than the signal level at the RF OUT port.

Measurement

Basic Accuracy

(Supplemental performance characteristics)

Measurement accuracy is specified at the connecting surface of the 7-mm connector of the Agilent 43961A under the following conditions:

| | | |
|---|-------|--|
| Warm up time | | > 30 minutes |
| Ambient temperature | | 23 °C ± 5 °C, within ±1 °C from the temperature at which calibration is performed |
| Signal level (setting) | | 0 to +15 dBm |
| Correction | | ON |
| IFBW (for calibration and measurement) | | ≤ 300 Hz |
| Averaging factor (for calibration and measurement) | | ≥ 8 |

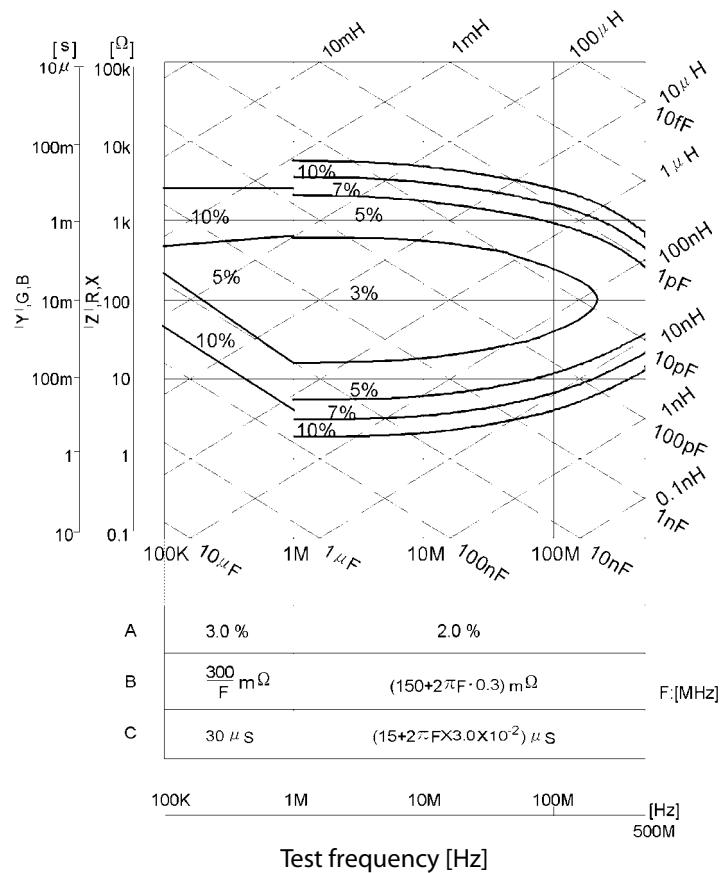


Figure 1-7. Impedance measurement accuracy

|Z| - θ accuracy

$$|Z| \text{ accuracy} \quad Z_\alpha = A + (B/|Z_m| + C \times |Z_m|) \times 100 [\%]$$

$$\theta \text{ accuracy} \quad \theta_\alpha = \sin^{-1}(Z_\alpha/100)$$

Where, $|Z_m|$ is $|Z|$ measured. A, B, and C are obtained from Figure 1-7.

|Y| - θ accuracy

$$|Y| \text{ accuracy} \quad Y_\alpha = A + (B \times |Y_m| + C/|Z_m|) \times 100 [\%]$$

$$\theta \text{ accuracy} \quad \theta_\alpha = \sin^{-1}(Y_\alpha/100)$$

Where, $|Y_m|$ is $|Y|$ measured. A, B, and C are obtained from Figure 1-7.

R - X accuracy (depends on D)

| Accuracy | D ≤ 0.2 | 0.2 < D ≤ 5 | 5 < D |
|----------|------------------------------------|-------------------------|------------------------------------|
| R_a | $\pm X_m \times X_a / 100[\Omega]$ | $R_a / \cos\theta [\%]$ | $R_a [\%]$ |
| X_a | $X_a [\%]$ | $X_a / \sin\theta [\%]$ | $\pm R_m \times R_a / 100[\Omega]$ |

Where,

D can be calculated as: R/X , or
 $R/(2\pi f \times L_s)$, or
 $R \times 2\pi f \times C_s$

θ can be calculated as: $\tan^{-1}(X/R)$, or
 $\tan^{-1}(2\pi f \times L_s/R)$, or
 $\tan^{-1}(1/(R \times 2\pi f \times C_s))$

$$R_a = A + (B/|R_m| + C \times |R_m|) \times 100 [\%]$$

$$X_a = A + (B/|X_m| + C \times |X_m|) \times 100 [\%]$$

R_m and X_m are the measured R and X, respectively. A, B, and C are obtained from Figure 1-7.

G - B accuracy (depends on D)

| Accuracy | D ≤ 0.2 | 0.2 < D ≤ 5 | 5 < D |
|----------|-------------------------------|-------------------------|------------------------------------|
| G_a | $\pm B_m \times B_a / 100[S]$ | $G_a / \cos\theta [\%]$ | $G_a [\%]$ |
| B_a | $B_a [\%]$ | $B_a / \sin\theta [\%]$ | $\pm G_m \times G_a / 100[\Omega]$ |

Where,

D can be calculated as: G/B , or
 $G/(2\pi f \times C_p)$, or
 $G \times 2\pi f \times L_p$

θ can be calculated as: $\tan^{-1}(B/G)$, or
 $\tan^{-1}(2\pi f \times C_p/G)$, or
 $\tan^{-1}(1/(G \times 2\pi f \times L_p))$

$$G_a = A + (B/|G_m| + C \times |G_m|) \times 100 [\%]$$

$$B_a = A + (B/|B_m| + C \times |B_m|) \times 100 [\%]$$

G_m and B_m are the measured G and B, respectively. A, B, and C are obtained from Figure 1-7.

D accuracy

| Accuracy | D ≤ 0.2 | 0.2 < D |
|----------|-------------|--------------------------------|
| D_a | $Z_a / 100$ | $(Z_a / 100) \times (1 + D^2)$ |

Where, Z_a is $|Z|$ accuracy.

L accuracy (depends on D)

| Accuracy | D ≤ 0.2 | 0.2 < D |
|----------|-------------|---------------|
| L_a | $L_a / 100$ | $L_a (1 + D)$ |

Where, $L_a = A + (B/|Z| + C \times |Z|) \times 100 [\%]$

$|Z| = 2\pi f \times L_m$, f is frequency in Hz, and L_m is measured L. A, B, and C are obtained from Figure 1-7.

C accuracy (depends on D)

| Accuracy | D ≤ 0.2 | 0.2 < D |
|----------|---------|---------------|
| C_a | C_a | $C_a (1 + D)$ |

Where, $C_a = A + (B/|Z_c| + C \times |Z_c|) \times 100 [\%]$

$|Z_c| = 2\pi f \times C_m$, f is frequency in Hz, and C_m is measured C. A, B, and C are obtained from Figure 1-7.

Common to Network/ Spectrum/ Impedance Measurement

| | |
|---|---|
| Display | |
| LCD | |
| Size/type | 8.4 inch color LCD |
| Number of pixels | 640 x 480 |
| Effective display area | 160 mm x 115 mm(600 x 430 dots) |
| Number of display channels | 2 |
| Format single, dual (split or overwrite) | |
| Number of traces | |
| For measurement | 2 traces |
| For memory | 2 traces |
| Data math | gain x data – offset, gain x (data - memory) – offset, gain x (data + memory) – offset, gain x (data/memory) – offset |
| Data hold | Maximum hold, minimum hold |
| Marker | |
| Number of markers | |
| Main marker | 1 for each channel |
| Sub-marker | 7 for each channel |
| △ marker | 1 for each channel |
| Hard copy | |
| Mode | Dump mode only (including color dump mode) |
| Storage | |
| Built-in flexible disk drive | |
| Type | 3.5 inch, 1.44 MByte, or 720 KByte, 1.44 MByte format is used for disk initialization |
| Memory | 512 KByte, can be backed up by flash memory |
| GPIB | |
| Interface | IEEE 488.1-1987, IEEE 488.2-1987, IEC 625, and JIS C 1901-1987 standards compatible |
| Interface function | SH1, AH1, T6, TEO, L4, LEO, SR1, RL1, PPO, DC1, DT1, C1, C2, C3, C4, C11, E2 |
| Data transfer formats | ASCII, 32 and 64 bit IEEE 754 floating point format, DOS PC format (32 bit IEEE with byte order reversed) |
| Printer parallel port | |
| Interface | IEEE 1284 Centronics standard compliant |
| Printer control language | PCL3 printer control language |
| Connector | D-SUB (25-pin) |

Option 4395A-001 DC voltage/current source

The setting of Option 4395A-001 DC voltage/current source is independent of channel 1 and channel 2 settings.

Voltage

Range -40 V to +40 V

Resolution 1 mV

Current limitation

at voltage setting = -25 V to +25 V ±100 mA

at voltage setting = -40 V to -25 V, 25 V to 40 V ±20 mA

Current

Range -20 μA to -100 mA, 20 μA to 100 mA

Resolution 20 μA

Voltage limitation

at current setting = -20 mA to +20 mA ±40 V

at current setting = -100 mA to -20 mA, 20 mA to 100 mA ±25 V

Accuracy

Voltage

at 23 °C ± 5 °C ±(0.1% + 4 mV + I_{dc}^{-1} [mA] × 5 [Ω] mV)

Current

at 23 °C ± 5 °C ±(0.5% + 30 μA + V_{dc}^{-2} [V]/10 [kΩ] mA)

Probe power

Output voltage +15 V (300 mA), -12.6 V (160 mA), GND nominal

Specifications when instrument BASIC is operated

Keyboard PS/2 style 101 English keyboard

Connector mini-DIN

8 bit I/O port

Connector D-SUB (15-pin)

Level TTL

Number of input/output bit 4 bit for input, 8 bit for output

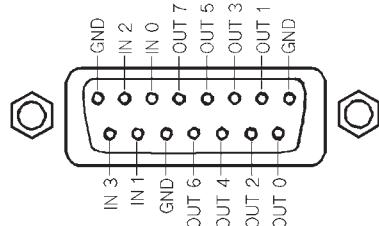


Figure 1-8. 8 bit I/O port pin assignments

24-bit I/O interface

Connector D-SUB (36-pin)

Level TTL

I/O 8-bit for input or output, 16-bit for output

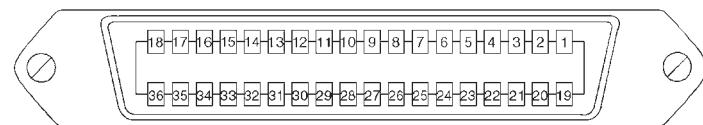


Figure 1-9. 24-bit I/O interface pin assignment

1. Current at DC source connector.
2. Voltage at DC source connector.

Table 1-1. Signal source assignment

| Pin No. | Signal name | Signal standard |
|----------------|-------------------------------|---|
| 1 | GND | 0 V |
| 2 | INPUT1 | TTL level, pulse input (pulse width: 1 μ s or above) |
| 3 | OUTPUT1 | TTL level, latch output |
| 4 | OUTPUT2 | TTL level, latch output |
| 5 | OUTPUT PORT A0 | TTL level, latch output |
| 6 | OUTPUT PORT A1 | TTL level, latch output |
| 7 | OUTPUT PORT A2 | TTL level, latch output |
| 8 | OUTPUT PORT A3 | TTL level, latch output |
| 9 | OUTPUT PORT A4 | TTL level, latch output |
| 10 | OUTPUT PORT A5 | TTL level, latch output |
| 11 | OUTPUT PORT A6 | TTL level, latch output |
| 12 | OUTPUT PORT A7 | TTL level, latch output |
| 13 | OUTPUT PORT B0 | TTL level, latch output |
| 14 | OUTPUT PORT B1 | TTL level, latch output |
| 15 | OUTPUT PORT B2 | TTL level, latch output |
| 16 | OUTPUT PORT B3 | TTL level, latch output |
| 17 | OUTPUT PORT B4 | TTL level, latch output |
| 18 | OUTPUT PORT B5 | TTL level, latch output |
| 19 | OUTPUT PORT B6 | TTL level, latch output |
| 20 | OUTPUT PORT B7 | TTL level, latch output |
| 21 | I/O PORT C0 | TTL level, latch output |
| 22 | I/O PORT C1 | TTL level, latch output |
| 23 | I/O PORT C2 | TTL level, latch output |
| 24 | I/O PORT C3 | TTL level, latch output |
| 25 | I/O PORT D0 | TTL level, latch output |
| 26 | I/O PORT D1 | TTL level, latch output |
| 27 | I/O PORT D2 | TTL level, latch output |
| 28 | I/O PORT D3 | TTL level, latch output |
| 29 | PORT C STATUS | TTL level, input mode: LOW, output mode: HIGH |
| 30 | PORT D STATUS | TTL level, input mode: LOW, output mode: HIGH |
| 31 | WRITE STROBE SIGNAL | TTL level, active low, pulse output (width: 10 μ s; typical) |
| 32 | +5 V PULLUP | |
| 33 | SWEEP END SIGNAL | TTL level, active low, pulse output (width: 20 μ s; typical) |
| 34 | +5 V | +5 V, 100 mA MAX |
| 35 | PASS/FAIL SIGNAL | TTL level, PASS: HIGH, FAIL: LOW, latch output |
| 36 | PASS/FAIL WRITE STROBE SIGNAL | TTL level, active low, pulse output (width: 10 μ s; typical) |

General Characteristics

Input and output characteristics

External reference input

| | |
|-----------------------|---------------------------|
| Frequency | 10 MHz \pm 100 Hz (SPC) |
| Level | -5 dBm to +5 dBm (SPC) |
| Input impedance | .50 Ω nominal |
| Connector | BNC female |

Internal reference output

| | |
|------------------------|----------------------|
| Frequency | 10 MHz nominal |
| Level | 0 dBm (SPC) |
| Output impedance | .50 Ω nominal |
| Connector | BNC female |

Reference oven output (Option 4395A-1D5)

| | |
|------------------------|----------------------|
| Frequency | 10 MHz nominal |
| Level | 0 dBm (SPC) |
| Output impedance | .50 Ω nominal |
| Connector | BNC female |

External trigger input

| | |
|------------------------|--------------------------------|
| Level | TTL |
| Pulse width (Tp) | $\geq 2 \mu\text{s}$ typically |
| Polarity | positive/negative selective |
| Connector | BNC female |

External program Run/Cont input

| | |
|-----------------|------------|
| Connector | BNC female |
| Level | TTL |

Gate output (Option 4395A-1D6)

| | |
|-----------------|------------|
| Level | TTL |
| Connector | BNC female |

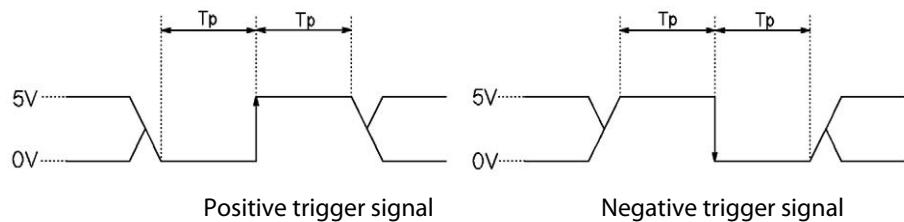


Figure 1-10. Trigger signal (external trigger input)

S-parameter test set interface
Connector D-SUB (25-pin)

Caution

Do not connect a printer to this connector. If you connect a printer with the S-parameter test set interface connector (TEST SET-I/O INTERCONNECT), it may cause damage to the printer.

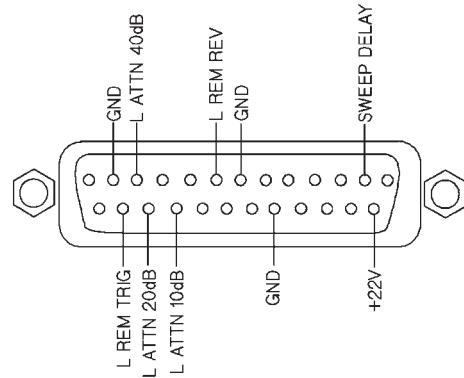


Figure 1-11. S-parameter test set interface pin assignments

External monitor output

Connector D-SUB (15-pin HD)
Display resolution 640 x 480 VGA

Operation conditions

Temperature

Disk drive non-operating condition 0 °C to 40 °C
 Disk drive operating condition 10 °C to 40 °C

Humidity

at wet bulb temperature ≤ 29 °C, without condensation
 Disk drive non-operating condition 15% to 95% RH
 Disk drive operating condition 15% to 80% RH

Altitude 0 to 2,000 m

Warm up time 30 minutes

Non-operation conditions

Temperature -20 °C to 60 °C

Humidity
 at wet bulb temperature ≤ 45 °C, without condensation 15% to 95% RH
Altitude 0 to 4,572 m

Others

EMC Complies with CISPR 11 (1990) / EN 55011(1991) : Group 1, Class A
 Complies with EN 50082-1 (1992) / IEC 1000-4-2 (1995) : 4 kV CD, 8 kV AD
 Complies with EN 50082-1 (1992) / IEC 801-3 (1984) : 3 V/m
 Complies with EN 50082-1 (1992) / IEC 1000-4-4 (1995) : 1 kV / Main, 0.5kV / Signal line
 Complies with IEC 1000-3-2 (1995) / EN 61000-3-2 (1995)
 Complies with IEC 1000-3-3 (1994) / EN 61000-3-3 (1995)

Safety Complies with IEC 1010-1 (1990),
 Amendment 1(1992), Amendment 2 (1995)
 Certified by CSA-C22.2 No.1010.1-92

Power requirements 90 V to 132 V, or 198 V to 264 V (automatically switched),
 47 to 63 Hz, 300 VA max.

Weight 21 kg (SPC)

Dimensions 425 (W) x 235 (H) x 553 (D) mm



Agilent Email Updates

www.agilent.com/find/emailupdates

Get the latest information on the products and applications you select.



Agilent Direct

www.agilent.com/find/agilentdirect

Quickly choose and use your test equipment solutions with confidence.

Remove all doubt

Our repair and calibration services will get your equipment back to you, performing like new, when promised. You will get full value out of your Agilent equipment throughout its lifetime. Your equipment will be serviced by Agilent-trained technicians using the latest factory calibration procedures, automated repair diagnostics and genuine parts. You will always have the utmost confidence in your measurements.

Agilent offers a wide range of additional expert test and measurement services for your equipment, including initial start-up assistance, onsite education and training, as well as design, system integration, and project management.

For more information on repair and calibration services, go to:

www.agilent.com/find/remove-

www.agilent.com

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Americas

| | |
|---------------|----------------|
| Canada | (877) 894-4414 |
| Latin America | 305 269 7500 |
| United States | (800) 829-4444 |

Asia Pacific

| | |
|-----------|----------------|
| Australia | 1 800 629 485 |
| China | 800 810 0189 |
| Hong Kong | 800 938 693 |
| India | 1 800 112 929 |
| Japan | 0120 (421) 345 |
| Korea | 080 769 0800 |
| Malaysia | 1 800 888 848 |
| Singapore | 1 800 375 8100 |
| Taiwan | 0800 047 866 |
| Thailand | 1 800 226 008 |

Europe & Middle East

| | |
|---------------------------|------------------------------|
| Austria | 0820 87 44 11 |
| Belgium | 32 (0) 2 404 93 40 |
| Denmark | 45 70 13 15 15 |
| Finland | 358 (0) 10 855 2100 |
| France | 0825 010 700* |
| | *0.125 € fixed network rates |
| Germany | 01805 24 6333** |
| | **0.14€/minute |
| Ireland | 1890 924 204 |
| Israel | 972-3-9288-504/544 |
| Italy | 39 02 92 60 8484 |
| Netherlands | 31 (0) 20 547 2111 |
| Spain | 34 (91) 631 3300 |
| Sweden | 0200-88 22 55 |
| Switzerland (French) | 41 (21) 8113811(Opt 2) |
| Switzerland (German) | 0800 80 53 53 (Opt 1) |
| United Kingdom | 44 (0) 118 9276201 |
| Other European Countries: | |

www.agilent.com/find/contactus

Revised: October 24, 2007

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2001, 2003, 2007
Printed in USA, November 19, 2007
5965-9340E



Agilent Technologies