


Agilent N1020A TDR Probe

Product Overview

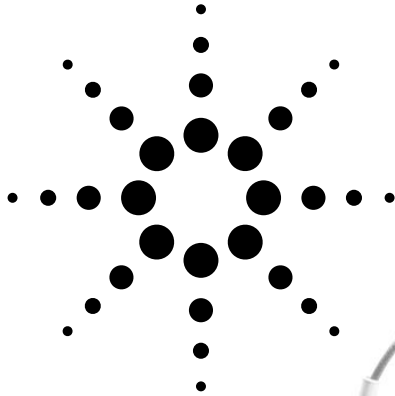

The Agilent N1020A TDR Probe is a useful accessory when making time domain reflectometry measurements on printed circuit boards. If no convenient method of connection is available, such as an SMA launch, then probing is the only viable solution. While most test engineers are very creative in designing and building the appropriate test fixture for each individual application, the Agilent TDR Probe is an off-the-shelf-solution. The benefits are:

- Stable and accurate measurements
- Reliable and repeatable positioning
- Wide bandwidth characteristics
- Faster setup than X-Y-Z positioners
- Minimizes damage to components
- Intuitive probing method



When used in conjunction with the Agilent 86100A Infiniium DCA (Agilent 54750 or 83480), it provides X, Y and Z positioning in one fluid motion. It's unique 3-D joystick has a 3:1 motion reduction with a fully articulating arm and allows simple positioning in any-thing from card cages to microstrip-line. If your test tasks get you into some tight spots, the TDR probe gives you a hands-free solution.

The tip of the Agilent TDR Probe incorporates a novel variable pitch, spring-loaded ground pin. The spring-loaded feature enables compensation of different height ground and

signal contacts. This will easily accommodate manufacturing tolerances of standard printed circuit board probing pads.

A linear pattern on the probe tip allows a variable ground pitch between 0.060" and 0.200" in 0.010" increments. The ground pin can be easily removed and replaced by the user with the supplied extraction tool. The versatility of this variable ground allows fast set up for different applications. No switching between probes or soldering fixtures is necessary.



Agilent Technologies

Innovating the HP Way

Supplemental Characteristics

Weight: 1.3 kg
Joystick travel: 17 x 17 x 13 mm
Arm reach: 100 to 220 mm
Arm sweep angle: +90 degrees
Probe pitch: 1.5 to 5.0 mm
Bandwidth: DC to 6 GHz
Insertion loss: <1.5 dB
Return loss: >16 dB
Connector: SMA 3.5 mm



By internet, phone, or fax, get assistance with all your test & measurement needs.

Online assistance:
www.agilent.com/find/si

**Phone or Fax
United States:**
(tel) 1 800 452 4844

Canada:
(tel) 1 877 894 4414
(fax) (905) 282 6495

Europe:
(tel) (31 20) 547 2000
(fax) (31 20) 547 2390

Japan:
(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Latin America:
(tel) (305) 269 7500
(fax) (305) 269 7599

Australia:
(tel) 1 800 629 485
(fax) (61 3) 9210 5947

New Zealand:
(tel) 0 800 738 378
(fax) 64 4 495 8950

Asia Pacific:
(tel) (852) 3197 7777
(fax) (852) 2506 9284

Product specifications and descriptions in this document subject to change without notice.

Copyright © 2000 Agilent Technologies
Printed in USA November 22, 2000
5968-4811E