

Agilent U1401A/U1401B Handheld Multi-function Calibrator/Meter

Data Sheet

Calibrate *while* you measure with just *one* tool

Agilent handheld multi-function calibrator/meter has all you need for quick validation, servicing or troubleshooting of process control devices on the go. Travel and test easily with one rugged, feature-packed tool. Agilent now offers its latest handheld calibrator/meter, the U1401B in all-new orange, providing capabilities and functions equivalent to the U1401A.

Features

- Dual display with bright LCD backlight
- Simultaneous source and measure
- Bipolar voltage and current, square-wave, auto scan and ramp outputs
- Full-span DMM capability, including temperature and frequency measurements
- Hold and Min/Max/Average recordings
- Data logging to PC with optional
- IR-to-USB cable
- Built-in charging capability



The 2-in-1 that helps you travel light

More often than not, the calibration of process control parts requires simultaneous measurements with a DMM. With the U1401A/U1401B, you can carry two tools in one—and calibrate while you measure. Slip the U1401A/U1401B in its sturdy carrying case and you're ready to go.

Rugged and tested to stringent standards

The U1401A/U1401B comes with a robust protective holster and tested to stringent industrial standards. Each U1401A/U1401B is also sealed with a three-year warranty and the assurance that you can perform your calibration tasks with confidence.

Full-featured DMM functions

The U1401A/U1401B is packed with a full span of DMM measurement functions, including AC+DC voltage and current, resistance, temperature, frequency, diode and continuity tests. It also equips you with recording functions such as Hold, Min/Max/Average and data logging to PC.



Agilent Technologies

Take a closer look



Input Specifications

The accuracy is given as \pm (% of reading + counts of least significant digit (LSD)) at $23\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$, with relative humidity less than 80% R.H., and after a warm-up period of at least five minutes. Without warm-up, an additional five counts of LSD need to be considered.

Voltage specifications

Function	Range	Resolution	Accuracy	Overload protection
DC voltage ^[1]	50 mV	1 μV	0.05% + 50 ^[2]	250 Vrms
	500 mV	10 μV	0.03% + 5	
	5 V	0.1 mV		
	50 V	1 mV		
	250 V	10 mV		
AC voltage ^[3] (True-rms: From 5% to 100% of range)	50 mV	1 μV	45 Hz to 5 kHz: 0.7% + 40 5 kHz to 20 kHz: 1.5% + 40	
	500 mV	10 μV	45 Hz to 5 kHz: 0.7% + 20 5 kHz to 20 kHz: 1.5% + 20	
	5 V	0.1 mV		
	50 V	1 mV		
	250 V	10 mV		
AC+DC voltage ^[3] (True-rms: From 5% to 100% of range)	50 mV	1 μV	45 Hz to 5 kHz: 0.8% + 70 5 kHz to 20 kHz: 1.6% + 70	
	500 mV	10 μV	45 Hz to 5 kHz: 0.8% + 25 5 kHz to 20 kHz: 1.6% + 25	
	5 V	0.1 mV		
	50 V	1 mV		
	250 V	10 mV		

1. Input impedance: 10 M Ω (nominal) for the range of 5 V and above, and 1 G Ω (nominal) for the 50/500 mV range.
2. Accuracy can be improved to 0.05% + 5. Always use the Relative function to offset thermal effects before measuring the signal.
3. Input impedance: 1.1 M Ω in parallel with < 100 pF (nominal) for the range of 5 V and above, and 1 G Ω (nominal) for the 50/500 mV range. Crest factor ≤ 3 .

Current specifications

Function	Range	Resolution	Accuracy	Burden voltage/shunt	Overload protection
DC current	50 mA	1 μ A	0.03% + 5 ^[1]	0.06 V (1 Ω)	250 V, 630 mA Quick acting fuse
	500 mA	10 μ A	0.03% + 5 ^[1]	0.6 V (1 Ω)	
AC current ^[2] (True-rms: From 5% to 100% of range)	50 mA	1 μ A	45 Hz to 5 kHz: 0.6% + 20	0.06 V (1 Ω)	
	500 mA	10 μ A	45 Hz to 5 kHz: 0.6% + 20	0.6 V (1 Ω)	
AC+DC current ^[2] (True-rms: From 5% to 100% of range)	50 mA	1 μ A	45 Hz to 5 kHz: 0.7% + 25	0.06 V (1 Ω)	
	500 mA	10 μ A	45 Hz to 5 kHz: 0.7% + 25	0.6 V (1 Ω)	

1. Always use the Relative function to offset thermal effects before measuring the signal. If this function is not used, accuracy could go down to 0.03% + 25. Thermal effects may be present due to:

 - Constant current, constant voltage, or square wave output.
 - Wrong operation. For example, resistance, diode, or mV measurement function is used to measure high voltage signals exceeding 250 V.
 - After battery charging has completed.
 - After measuring current greater than 50 mA.
2. Crest factor ≤ 3

Temperature specifications

Thermocouple type	Range	Resolution	Accuracy ^[1]	Overload protection
K	-40 °C to 1372 °C	0.1 °C	0.3% + 3 °C	250 Vrms
	-40 °F to 2502 °F	0.1 °F	0.3% + 6 °F	

Resistance specifications

The following resistance specifications are valid if the maximum open voltage is less than +4.8 V.

Range	Resolution	Accuracy	Minimum input current	Overload protection
500 Ω	0.01 Ω	0.15% + 8 ^[2]	0.45 mA	250 Vrms
5 kΩ	0.1 Ω	0.15% + 5 ^[2]	0.45 mA	
50 kΩ	1 Ω		45 μA	
500 kΩ	10 Ω		4.5 μA	
5 MΩ	0.1 kΩ		450 nA	
50 MΩ	1 kΩ	1% + 8 ^[3]	45 nA	

Diode and continuity specifications

For diode test, the overload protection is 250 Vrms and the instrument will beep when the reading is below 50 mV (approx). For continuity test, the instrument will beep when the resistance is less than 10.00 Ω.

Resolution	Accuracy	Test current	Open voltage
0.1 mV	0.05% + 5	Approximately 0.45 mA	< +4.8 VDC

1 ms peak hold specifications

Signal width	Accuracy for DC mV/voltage/current
Single event > 1 ms	2% + 400 for all ranges

1. Accuracy is specified for meter operation only, excludes thermocouple probe tolerance and with the instrument placed in the operating area for at least one hour.
2. Accuracy is specified after applying the Relative function to offset any test lead resistance and thermal effect.
3. Accuracy is specified for < 60% R.H.

Frequency specifications

Range	Resolution	Accuracy	Minimum input frequency	Overload protection
100 Hz	0.001 Hz	0.02% + 3	1 Hz	250 Vrms
1 kHz	0.01 Hz			
10 kHz	0.1 Hz			
100 kHz	1 Hz			
200 kHz	10 kHz			

Frequency sensitivity and trigger level for voltage measurement

Input range	Minimum sensitivity (rms sine wave)		Trigger level for DC coupling	
	1 Hz to 100 kHz	> 100 kHz	< 20 kHz	20 kHz to 200 kHz
50 mV	15 mV	25 mV	20 mV	30 mV
500 mV	35 mV	50 mV	60 mV	80 mV
5 V	0.3 V	0.5 V	0.6 V	0.8 V
50 V	3V	5 V	6 V	8 V
250 V	30 V	–	60 V	–

Frequency sensitivity for current measurement

Input range	Minimum sensitivity (rms sine wave)
	30 Hz to 20 kHz
50 mA	2.5 mA
500 mA	25 mA

Duty cycle and pulse width

Function	Mode	Range	Accuracy at full scale ^[1]
Duty cycle	DC coupling	0.1% to 99.9%	0.3% per kHz + 0.3%
	AC coupling	5% to 95%	
Pulse width ^[2]	–	0.01 ms to 1999.9 ms	0.2% + 3

1. Accuracy is based on a 5-V square-wave input to the 5 VDC range.

2. Pulse width must be greater than 10 μ s and its range is determined by the frequency of the signal.

Output Specifications

Accuracy is given as \pm (% of output + counts of least significant digit (LSD)) at 23 °C \pm 5 °C, with relative humidity less than 80% R.H., and after a warm-up period of at least five minutes. The maximum input voltage protection is 30 VDC.

Constant voltage and current outputs


Function	Range	Resolution	Accuracy	Minimum output
Constant voltage (CV)	\pm 1.500 V	0.1 mV	0.03% + 3	25 mA or above ^[1]
	\pm 15.000 V	1 mV		
Constant current (CC)	\pm 25.000 mA	1 μ A	0.03% + 5	12 V or above ^{[2][3]}

Square wave output

Output	Range	Resolution	Accuracy
Frequency (Hz)	0.5, 1, 2, 5, 10, 15, 20, 25, 30, 40, 50, 60, 75, 80, 100, 120, 150, 200, 240, 300, 400, 480, 600, 800, 1200, 1600, 2400, 4800	0.01	0.005% + 1
Duty Cycle (%) ^[4]	0.39% to 99.60%	0.390625%	0.01% + 0.2% ^[5]
Pulse Width (ms) ^[4]	1/Frequency	Range/256	0.01% + 0.3 ms
Amplitude (V)	5 V, 12 V	0.1 V	2% + 0.2 V
	\pm 5 V, \pm 12 V	0.1 V	2% + 0.4 V

1. Loading coefficient: 0.012 mV/mA for 1.5 V output.
2. Loading coefficient: 1 μ A/V. The minimum output voltage is based on 20 mA into a 600 Ω load.
3. If the current loop has a 24-V power, a minimum output voltage of 24 V is achievable with a 20 mA current into a 1200- Ω load (using the yellow test lead).
4. The positive or negative pulse width must be greater than 50 μ s to enable adjustment of duty cycle or pulse width under different frequencies. Otherwise, the accuracy and range will be different from the specifications defined.
5. For signal frequencies greater than 1 kHz, add an addition of 0.1% per kHz.

General Specifications

Display	Both primary and secondary displays are 5-digit on the liquid crystal display (LCD) with a maximum resolution of 50,000 counts and automatic polarity indication. Backlight available.
Power supply	<ul style="list-style-type: none"> • 9.6 V Ni-MH rechargeable batteries: 1.2 V x 8 pieces. <i>No cadmium, lead or mercury.</i> • External switching adapter: AC 100 V to 240 V, 50/60 Hz input and DC 24 V/2.5 A output
Power consumption	<ul style="list-style-type: none"> • Battery charging: 9.3 VA typical • Sourcing of constant current at 25 mA, maximum load: 5.5 VA typical on 24 V DC adapter, 2.4 VA typical on 9.6 V batteries • Meter only: 1.8 VA typical on 24 V DC adapter, 0.6 VA typical on 9.6 V batteries
Battery life	Assuming fully-charged Ni-MH batteries: Meter only: 20 hours (approx.) Source/Meter: 4 hours (approx.)  will appear when voltage drops below 9 V (approx.)
Charging time	3 hours (approx.) in 10 °C to 30 °C environment NOTE: Prolonged charging is required if battery is fully discharged
Measurement rate	3 readings/second, except for: <ul style="list-style-type: none"> • AC+DC: 1 reading/second • Frequency and duty cycle (> 1 Hz): 1 reading/second • Pulse width (> 1 Hz): 0.25 to 1 reading/second
Common mode rejection ratio (CMRR)	> 90 dB at DC, 50/60 Hz \pm 0.1% (1 k Ω unbalanced)
Normal mode rejection ratio (NMRR)	> 60 dB at DC, 50/60 Hz \pm 0.1%
Operating environment	0 °C to 40 °C; up to 80% relative humidity (R.H.) for temperatures up to 31 °C, decreasing linearly to 50% R.H. at 40 °C
Storage environment	-20 °C to 60 °C with batteries removed; 5% to 80% R.H. non-condensing
Altitude	0 to 2000 m
Safety compliance	IEC 61010-1:2001/EN61010-1:2001 (2nd Edition), CAN/CSA-C22.2 No. 61010-1-04, ANSI/UL 61010-1:2004, CAT II 150 V Overvoltage Protection, Pollution Degree 2
EMC compliance	IEC61326-2-1:2005/EN61326-2-1:2006, ICES-001:2004, AS/NZS CISPR11:2004
Temperature coefficient	<ul style="list-style-type: none"> • Input: 0.15 x (specified accuracy)/°C (from 0 °C to 18 °C or 28 °C to 40 °C) • Output: \pm(50 ppm output + 0.5 digit)/°C
Dimensions (H x W x D)	192 mm x 90 mm x 54 mm
Weight	0.98 kg with holster and batteries
Calibration	One-year calibration cycle recommended
Warranty	<ul style="list-style-type: none"> • 3 years for main unit • 3 months for standard accessories unless otherwise specified

Ordering Information



U1401A

U1401B

Standard shipped items



- Quick Start Guide
 - Certificate of calibration (CoC)
 - Calibrator/meter standard test lead kit
 - Yellow test lead for mA simulation
 - Protective holster
 - Rechargeable battery pack
 - AC power adapter and cord (according to country)
- * Soft carrying case is included for U1401A.


Optional accessories




U5481A IR-to-USB cable



U1186A K-type thermocouple and adapter

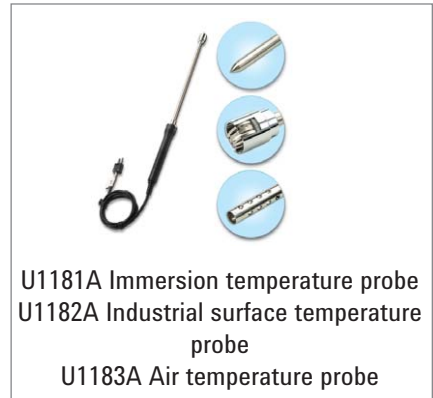

U1181A Immersion temperature probe
U1182A Industrial surface temperature probe
U1183A Air temperature probe

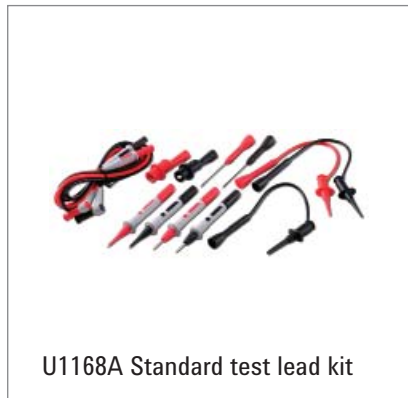

U1168A Standard test lead kit



U5491A Soft carrying case



U5402A Yellow test lead for mA simulation

More accessories at: www.agilent.com/find/handheld-calibrator-meter

 **Agilent Email Updates**

www.agilent.com/find/emailupdates

Get the latest information on the products and applications you select.



www.lxistandard.org

LXI is the LAN-based successor to GPIB, providing faster, more efficient connectivity. Agilent is a founding member of the LXI consortium.

Agilent Channel Partners

www.agilent.com/find/channelpartners

Get the best of both worlds: Agilent's measurement expertise and product breadth, combined with channel partner convenience.

Remove all doubt

Our repair and calibration services will get your equipment back to you, performing like new, when promised. You will get full value out of your Agilent equipment throughout its lifetime. Your equipment will be serviced by Agilent-trained technicians using the latest factory calibration procedures, automated repair diagnostics and genuine parts. You will always have the utmost confidence in your measurements. For information regarding self maintenance of this product, please contact your Agilent office.

Agilent offers a wide range of additional expert test and measurement services for your equipment, including initial start-up assistance, onsite education and training, as well as design, system integration, and project management.

For more information on repair and calibration services, go to:

www.agilent.com/find/removealldoubt

www.agilent.com
www.agilent.com/find/handheld-calibrator-meter

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at: www.agilent.com/find/contactus

Americas

Canada	(877) 894 4414
Latin America	305 269 7500
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Thailand	1 800 226 008

Europe & Middle East

Austria	43 (0) 1 360 277 1571
Belgium	32 (0) 2 404 93 40
Denmark	45 70 13 15 15
Finland	358 (0) 10 855 2100
France	0825 010 700*
	*0.125 €/minute
Germany	49 (0) 7031 464 6333
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
Switzerland	0800 80 53 53
United Kingdom	44 (0) 118 9276201

Other European Countries:

www.agilent.com/find/contactus

Revised: October 1, 2009

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2010
Printed in USA, January 4, 2010
5990-3459EN



Agilent Technologies