

Programmable DC Electronic Load

MODEL 6310A SERIES

Key Features:

- Max Power: 200W, 100W×2(Dual), 30W & 250W, 300W, 600W, 1200W
- Wide range 0~500V operating voltage
- Compatibility between 6310 and 6310A
- Up to eight channels in one mainframe, for testing multiple output SMPS
- Parallel load modules up to 1200W for high current and power applications
- Synchronization with multiple loads
- Flexible CC, CR, CP and CV operation modes
- Dynamic loading with speeds up to 20kHz
- Fast response of 0.32mA/μs ~ 10A/μs slew rate
- Minimum input resistance allows the load to sink high current at low voltages
- Real time power supply load transient response simulation and output measurements
- User programmable 100 sequences. Front panel input status for user-friendly operation
- High/Low limits of testing parameters to test GO/NG
- Digital I/O control
- Over current protection (OCP) testing function
- 16-bit precision voltage and current measurement with dual-range
- Remote sensing capability
- Short circuit test
- Self-test at power-on
- Full Protection: OV, OC, OP, OT and reverse protection
- USB, GPIB & RS-232 interfaces



PROGRAMMABLE DC ELECTRONIC LOAD MODEL 6310A SERIES

The Chroma 6310A series Programmable DC Electronic Load is ideal for the test and evaluation of multi-output AC/DC power supplies, DC/DC converters, chargers and power electronic components. It is designed for applications in research and development, production, and incoming inspection. The system is configured by plugging the user selectable load modules into the system mainframe. The user interfaces include an ergonomically designed user friendly keypad on the front panel and the following computer interfaces: RS-232, USB or GPIB.

The 6310A series offers 8 different modules with power ratings from 100 watts to 1,200 watts, current ratings from 0.5mA to 240A, and voltage ratings from 0.5mV to 500V. The loads can be operated in constant current, constant voltage, constant power and constant resistance and may be placed in parallel for increased current and power.

The 6310A series can simulate a wide range of dynamic loading applications. The waveforms

programmable parameters include: slew rate, load level, duration and conducting voltage. In addition, up to 100 sets of system operating status can be stored in EEPROM and recalled instantly for automated testing applications.

Real time measurement of voltage and current are integrated into each 6310A load module using a 16-bit precision measurement circuit. The user can perform on line voltage measurements and adjustments or simulate short circuit test using the user friendly keypad on the front panel. Additionally, the 6310A series offers an optional remote controller for automated production lines.

The 6310A series has a self-diagnosis routines to maintain instrument performance. It also provides OP, OC, OV, OT, and reverse polarity protection to guarantee quality and reliability for even in the most demanding engineering testing and ATE applications.




Chroma



VERSATILE SYSTEM CONFIGURATION

Chroma 6310A Programmable Electronic Load integrates microprocessor capabilities into each load module and mainframe to provide simple and accurate parallel operation to optimize the speed and control among multiple load modules. All load modules may be configured to work synchronously, to test multiple outputs simultaneously, thus simulating real life applications.

6310A System Block Diagram

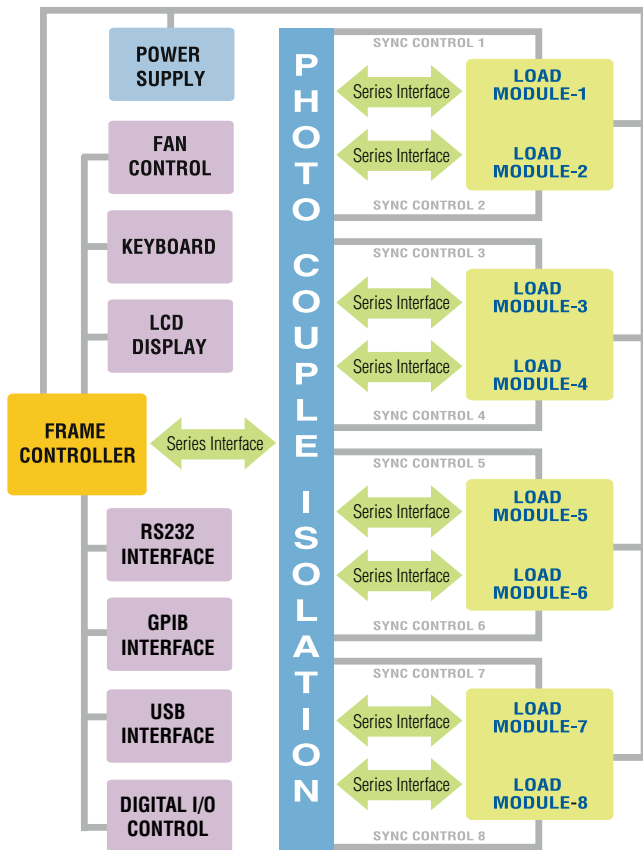

COMPATIBILITY WITH 6310 SERIES

The 6310A series load modules will be compatible with the 6310 series mainframes (6312/6314). In addition, the remote control commands will be compatible between the 6310 and the 6310A series without needing to re-writing any remote control programs.

MODULE LOAD DESIGN





The Chroma 6314A 1200W and 6312A 600W electronic load mainframes accept the user-installable 6310A series load modules for easy system configuration and will mount in a 19" instrument rack. The 6314A holds up to four 63102A load modules, which will result in an 8-channel 100W/channel load with standard front-panel inputs. This makes it ideal for testing

multiple output switching power supplies and multiple DC-DC converters. There are also higher wattage modules that may be mixed and matched for an even more versatile system. Additionally, the GO/NG output port is useful for UUT's pass/fail testing on an automated production line. All modules on the 6314A/6312A mainframe share a common GPIB address to synchronize and speed up the control of the load modules and the read-back of data.





APPLICATION OF SPECIFIC LOAD SIMULATION

The 6310A load modules operate in constant current, constant voltage, constant power or constant resistance to satisfy a wide range of test requirements. For example, the test of a battery charger can be simulated easily by setting the load to operate in constant voltage.

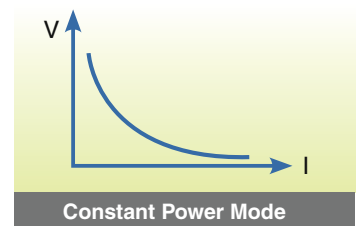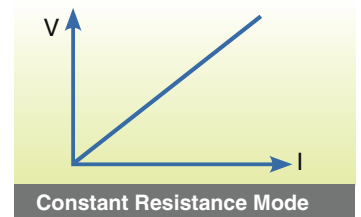


Each load module is designed with state-of-the-art technology and connects all the power MOSFET devices in parallel to insure high accuracy load control with a minimum drift of less than 0.1%+0.1%F.S. of the current setting. Chroma's use of FET technology provides minimum input resistance and enables the load to sink high current even at very low voltages. For example, the model 63103A is capable of sinking 60A at 1V, and well-suited for testing the new 3.3V low voltage power supplies. Low voltage operation, down to zero volts, is possible at reduced current levels. The 6310A load module uses a photo coupler for isolation between the

output and control sections, thus each load is isolated and floating. The user can use multiple load modules independently to test multi-output power supplies, or parallel them for high power testing applications.

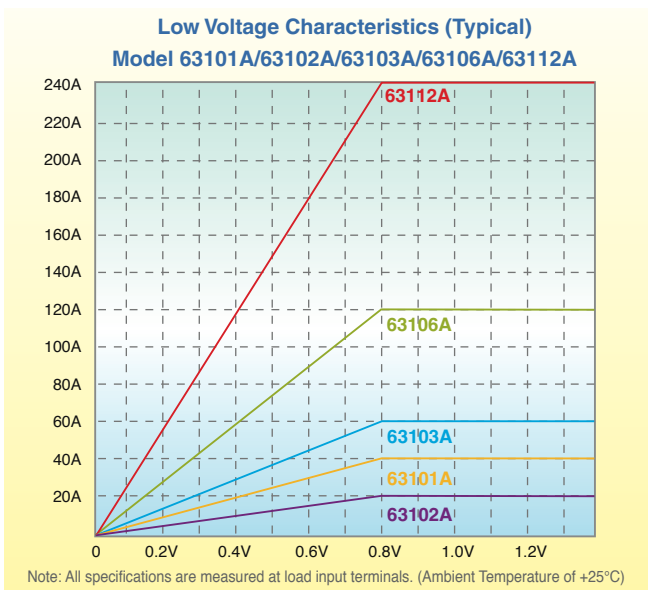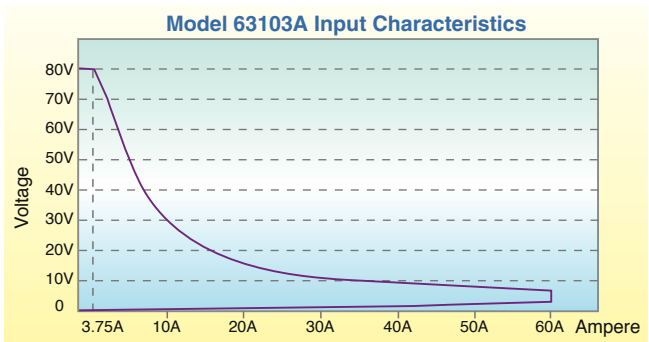

DYNAMIC LOADING AND CONTROL

Modern electronic devices operate at very high speeds and require fast dynamic operation of their power providing components. To satisfy these testing applications, the 6310A loads offer high speed, programmable dynamic load simulation and control capability. The figure below shows the programmable parameters of the 6310A modules:

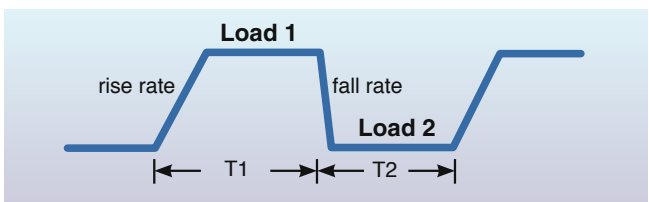

The programmable slew rate makes the simulation of transient load change demanded by real life applications possible. The 6310A internal waveform generator is capable of producing a maximum slew rate at 10A/μs, and dynamic cycling up to 20kHz. It's dedicated remote load sense and control circuit guarantee minimum waveform distortion during continuous load changes.

PARALLEL CONTROL

The 6310A provides parallel control, which enables high power testing when a single module cannot meet the requirement of high power applications. Two or more load modules can be paralleled together to achieve the desired loading. The 6310A comes with RS-232 as standard for remote control and automated testing applications. The USB and GPIB interfaces are available as options.

In addition, the 6310A, through its synchronized controls, provides an efficient solution for testing single output AC to DC or DC to DC converters by controlling multiple loads. The 6310A provides the capability to test up to 8 UUTs at a time.


POWERFUL MEASUREMENTS

Each 6310A load module has an integrated 16-bit precision A/D converter for voltage measurement with an accuracy of 0.025%+0.025% of full scale. The built-in resistive load current sensing circuit is capable of measuring current with an accuracy of 0.05%+0.05% of full scale. Also, short circuit can be simulated. All measurements are done using remote sensing to eliminate any error due to voltage drops along the measurement path. The user can also select from a complete set of voltage and current measurements.

OCP TEST

Modern switching power supplies are designed with over current protection (OCP) circuitry; therefore, it is important to test the OCP circuitry to make sure it is functioning within its designed specifications. The 6310A series provides an easy and fast solution for this testing.

By simply choosing the channel and setting the OCP parameters (start current, end current, step current and dwell time) from the front panel, the 6310A series provides a fast and easy OCP testing solution. The 6310A series will automatically detect the OCP point, making it an ideal solution for design verification as well as production line testing.

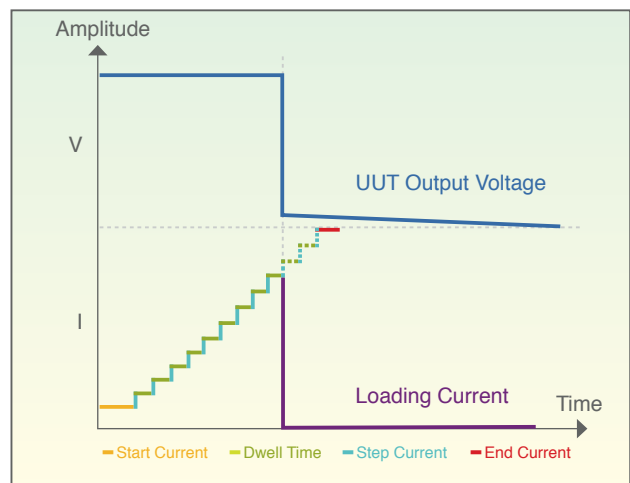


TIMING FUNCTION

The 6310A series of loads include a unique timing & measurement function, which allows precise time measurements in the range of 1ms to 86,400s. This feature allows the user to set the final voltage & timeout values for battery discharge testing and other similar applications.

For example, the figure on the right shows the 6310A internal timer starting at load ON, and ending when the battery voltage reaches the final voltage.

The Timing function can be used in testing battery and super capacitor discharge, or other similar applications.

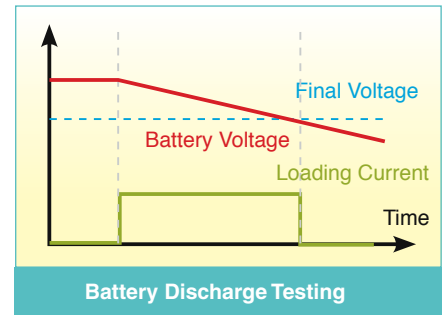


DIGITAL I/O


The digital I/O interface makes the 6310A DC Load the ideal choice for automated testing requirements. Through the digital I/O, the 6310A can accept digital signals to trigger its functions (Load On/Off, OCP test, etc.) as well as current output status signals.

Pin	Definition	Pin	Definition
Pin 1	Reserved	Pin 9	Short Signal (O/P)
Pin 2	DGND	Pin 10	Protection Signal (O/P)
Pin 3	DGND	Pin 11	External Load ON/OFF (I/P)
Pin 4	DGND	Pin 12	Reserved
Pin 5	DGND	Pin 13	Reserved
Pin 6	Load ON/OFF (O/P)	Pin 14	DGND
Pin 7	Total Pass (O/P)	Pin 15	External Trig. For Sequences Run (I/P)
Pin 8	Total Fail (O/P)		

PANEL DESCRIPTION

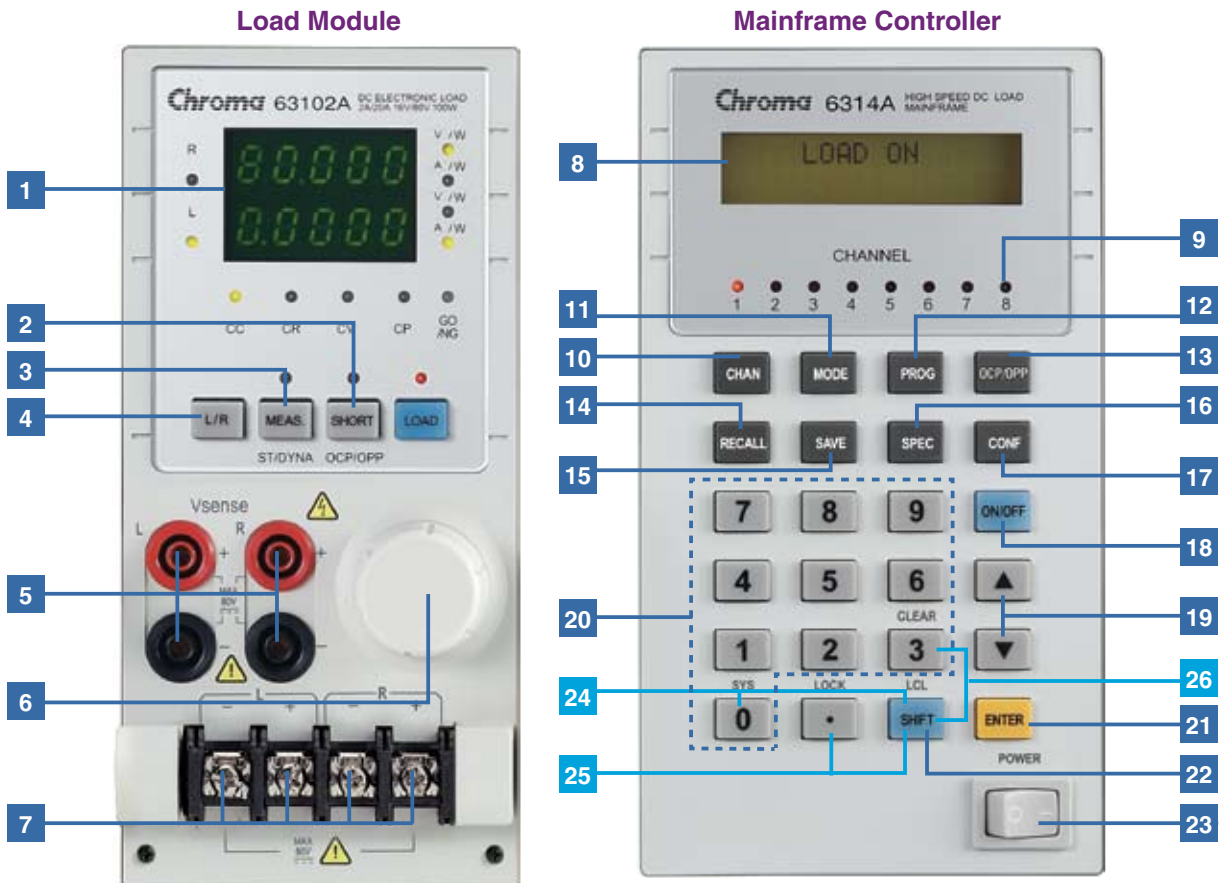

Rear Panel

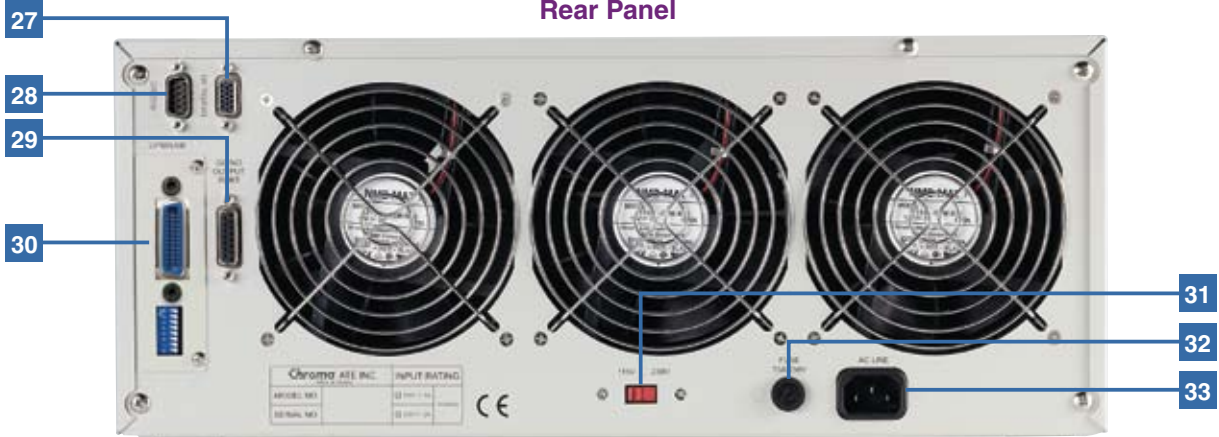

- | | |
|--|--|
| <ul style="list-style-type: none"> 1 LED indicator 2 SHORT key : To apply a short circuit across the input 3 STATIC/DYNA key : To select static or dynamic test mode 4 L/R key : To select left or right channel of input load(63102A, 63107A)
A/B key : To select static A or B load (other models) 5 V terminal : To measure the UUT's output voltage using remote sense 6 Rotary knob : To adjust load setting continuously 7 Load terminal 8 LCD display 9 LED indicator : To display the channel at which load is set 10 CHAN key : To select input load channel 11 MODE key : To select the operation mode of CC, CR, CV, or CP 12 PROG key : For program data setting 13 OCP/OPP key : Over current protection/Over power protection testing 14 RECALL key : To recall the front panel input status from memory 15 SAVE key : To save the front panel input status into memory 16 SPEC key : To set up High/Low limits for GO/NG test 17 CONF key : To set the configuration | <ul style="list-style-type: none"> 18 ON/OFF key : To enable or disable the load input 19 Up/Down key : To select the next or previous display in edit mode 20 Numeric key : For data setting 21 ENTER key : To confirm editing data on the instrument 22 SHIFT key : As LOCAL Key when in remote mode 23 Power switch 24 SHIFT + 0 key : System function 25 SHIFT + . key : Lock function 26 SHIFT + 3 key : Clear the currently edited data 27 Digital I/O : Used for system input/output control signals 28 RS-232 connector 29 GO/NG output port 30 GPIB or USB slot 31 AC input voltage switch 32 AC input fuse 33 AC input connector |
|--|--|

6310A SERIES PROGRAMMABLE DC ELECTRONIC LOAD FAMILY



63112A

63106A / 63108A

63102A

63107A

63101A

63103A

63105A



6314A : 4 in 1 Mainframe



6312A : 2 in 1 Mainframe



A631001: Remote Controller



A630002 : GPIB Interface




A631003 : USB Interface

A MULTIPLE SELECTION FOR MULTIPLE OUTPUT SMPS TEST APPLICATION

Modern switching power supplies are getting more complicated with more outputs and control signals for PC and system requirements. For example, ATX power supplies need more channels of load to simulate or test their outputs than traditional AT power supplies. The Chroma's 6310A series provides a solution by offering a broad selection of load modules, which will provide up to 8-channels of loading in a standard mainframe.

Product Lineup			
Model	Power	Operation Voltage	Current
63101A	200W	0~80V	40A
63103A	300W	0~80V	60A
63106A	600W	0~80V	120A
63112A	1200W	0~80V	240A
63102A	100W x 2	0~80V	20A(Dual Channels)
63107A	250W & 30W	0~80V	40A & 5A(Dual Channels)
63105A	300W	0~500V	10A
63108A	600W	0~500V	20A

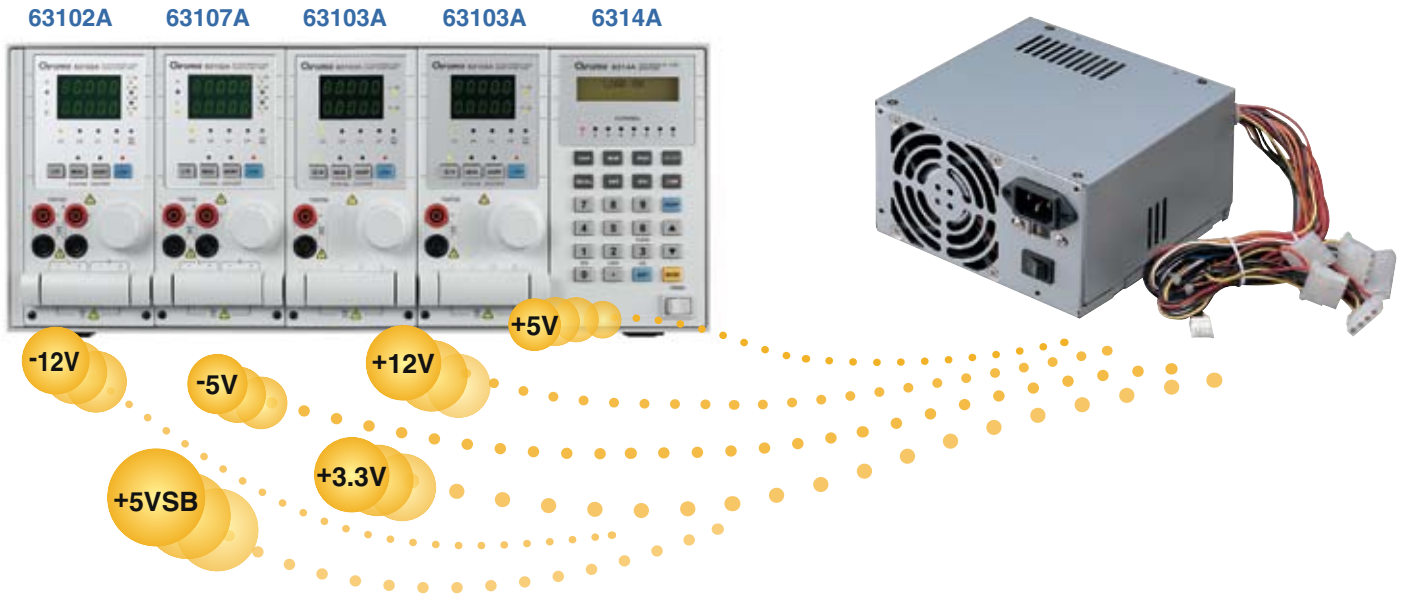

A more efficient solution to testing the single output AC to DC or DC to DC converters is to synchronize the control with multiple loads to test 8 UUTs at one time.



Testing 8 Units at one time

ORDERING INFORMATION

6312A : Mainframe for 2 Load Modules
 6314A : Mainframe for 4 Load Modules
 63101A : Load Module 40A/80V/200W
 63102A : Load Module 20A/80V/100Wx2 channels
 63103A : Load Module 60A/80V/300W

63105A : Load Module 10A/500V/300W
 63106A : Load Module 120A/80V/600W
 63107A : Load Module 5A&40A/80V/30W&250W
 63108A : Load Module 20A/500V/600W
 63112A : Load Module 240A/80V/1200W

A630002 : GPIB Interface for Model 6314A, 6312A
 A631003 : USB Interface for Model 6314A, 6312A
 A631001 : Remote Controller
 A631002 : Test Fixture
 A631005 : 6310A Series Softpanel

SPECIFICATIONS

Model	63101A		63102A (100Wx2)		63103A		63105A	
Power	20W	200W	20W	100W	30W	300W	30W	300W
Current	0~4A	0~40A	0~2A	0~20A	0~6A	0~60A	0~1A	0~10A
Voltage	0~80V		0~80V		0~80V		0~500V	
Typical Min. Operation Voltage (DC)*1	0.4V@2A	0.4V@20A	0.4V@1A	0.4V@10A	0.4V@3A	0.4V@30A	1.0V@0.5A	1.0V@5A
	0.8V@4A	0.8V@40A	0.8V@2A	0.8V@20A	0.8V@6A	0.8V@60A	2.0V@1A	2.0V@10A
Constant Current Mode								
Range	0~4A	0~40A	0~2A	0~20A	0~6A	0~60A	0~1A	0~10A
Resolution	1mA	10mA	0.5mA	5mA	1.5mA	15mA	0.25mA	2.5mA
Accuracy	0.1%+0.1%F.S.	0.1%+0.2%F.S.	0.1%+0.1%F.S.	0.1%+0.2%F.S.	0.1%+0.1%F.S.	0.1%+0.2%F.S.	0.1%+0.1%F.S.	0.1%+0.2%F.S.
Constant Resistance Mode								
Range	0.0375Ω~150Ω (200W/16V) 1.875Ω~7.5kΩ (200W/80V)		0.075Ω~300Ω (100W/16V) 3.75Ω~15kΩ (100W/80V)		0.025Ω~100Ω (300W/16V) 1.25Ω~5kΩ (300W/80V)		1.25Ω~5kΩ (300W/125V) 50Ω~200kΩ (300W/500V)	
Resolution	12 bits		12 bits		12 bits		12 bits	
Accuracy	150Ω: 0.1Ω + 0.2% 7.5kΩ: 0.01Ω + 0.1%		300Ω: 0.1Ω + 0.2% 15kΩ: 0.01Ω + 0.1%		100Ω: 0.1Ω + 0.2% 5kΩ: 0.01Ω + 0.1%		5kΩ: 20mΩ + 0.2% 200kΩ: 5mΩ + 0.1%	
Constant Voltage Mode								
Range	0~80V		0~80V		0~80V		0~500V	
Resolution	20mV		20mV		20mV		125mV	
Accuracy	0.05% ± 0.1%F.S.		0.05% ± 0.1%F.S.		0.05% ± 0.1%F.S.		0.05% ± 0.1%F.S.	
Constant Power Mode								
Range	0~20W	0~200W	0~20W	0~100W	0~30W	0~300W	0~30W	0~300W
Resolution	5mW	50mW	5mW	25mW	7.5mW	75mW	7.5mW	75mW
Accuracy	0.5% ± 0.5%F.S.		0.5% ± 0.5%F.S.		0.5% ± 0.5%F.S.		0.5% ± 0.5%F.S.	
Dynamic Mode								
Dynamic Mode	C.C. Mode		C.C. Mode		C.C. Mode		C.C. Mode	
T1 & T2	0.025ms ~ 50ms / Res: 5μs 0.1ms ~ 500ms / Res: 25μs 10ms ~ 50s / Res: 2.5ms		0.025ms ~ 50ms / Res: 5μs 0.1ms ~ 500ms / Res: 25μs 10ms ~ 50s / Res: 2.5ms		0.025ms ~ 50ms / Res: 5μs 0.1ms ~ 500ms / Res: 25μs 10ms ~ 50s / Res: 2.5ms		0.025ms ~ 50ms / Res: 5μs 0.1ms ~ 500ms / Res: 25μs 10ms ~ 50s / Res: 2.5ms	
Accuracy	1μs/1ms+100ppm		1μs/1ms+100ppm		1μs/1ms+100ppm		1μs/1ms+100ppm	
Slew Rate	0.64~160mA/μs	6.4~1600mA/μs	0.32~80mA/μs	3.2~800mA/μs	0.001~0.25A/μs	0.01~2.5A/μs	0.16~40mA/μs	1.6~400mA/μs
Resolution	0.64mA/μs	6.4mA/μs	0.32mA/μs	3.2mA/μs	0.001A/μs	0.01A/μs	0.16mA/μs	1.6mA/μs
Min. Rise Time	10μs (Typical)		10μs (Typical)		10μs (Typical)		24μs (Typical)	
Current	0~4A	0~40A	0~2A	0~20A	0~6A	0~60A	0~1A	0~10A
Resolution	1mA	10mA	0.5mA	5mA	1.5mA	15mA	0.25mA	2.5mA
Current Accuracy	0.4%F.S.		0.4%F.S.		0.4%F.S.		0.4%F.S.	
Measurement Section								
Voltage Read Back								
Range	0~16V	0~80V	0~16V	0~80V	0~16V	0~80V	0~125V	0~500V
Resolution	0.25mV	1.25mV	0.25mV	1.25mV	0.25mV	1.25mV	2mV	8mV
Accuracy	0.025% + 0.025%F.S.		0.025% + 0.025%F.S.		0.025% + 0.025%F.S.		0.025% + 0.025%F.S.	
Current Read Back								
Range	0~4A	0~40A	0~2A	0~20A	0~6A	0~60A	0~1A	0~10A
Resolution	0.0625mA	0.625mA	0.03125mA	0.3125mA	0.09375mA	0.9375mA	0.016mA	0.16mA
Accuracy	0.05% + 0.05%F.S.		0.05% + 0.05%F.S.		0.05% + 0.05%F.S.		0.05% + 0.05%F.S.	
Power Read Back*2								
Range	0~20W	0~200W	0~20W	0~100W	0~30W	0~300W	0~30W	0~300W
Accuracy	0.1% + 0.1%F.S.		0.1% + 0.1%F.S.		0.1% + 0.1%F.S.		0.1% + 0.1%F.S.	
Protective Section								
Over Power Protection	≒ 20.8W	≒ 208W	≒ 20.8W	≒ 104W	≒ 31.2W	≒ 312W	≒ 31.2W	≒ 312W
Over Current Protection	≒ 4.08A	≒ 40.8A	≒ 2.04A	≒ 20.4A	≒ 6.12A	≒ 61.2A	≒ 1.02A	≒ 10.2A
Over Temperature Protection	≒ 85°C		≒ 85°C		≒ 85°C		≒ 85°C	
Over Voltage Protection	≒ 81.6V		≒ 81.6V		≒ 81.6V		≒ 510V	
General								
Short Circuit								
Current (CC)	-	≒ 40A	-	≒ 20A	-	≒ 60A	-	≒ 10A
Voltage (CV)	-	0V	-	0V	-	0V	-	0V
Resistance (CR)	-	≒ 0.0375Ω	-	≒ 0.075Ω	-	≒ 0.025Ω	-	≒ 1.25Ω
Power (CP)	-	≒ 200W	-	≒ 100W	-	≒ 300W	-	≒ 300W
Input Resistance (Load Off)	100kΩ (Typical)		100kΩ (Typical)		100kΩ (Typical)		100kΩ (Typical)	
Temperature Coefficient	100PPM/°C (Typical)		100PPM/°C (Typical)		100PPM/°C (Typical)		100PPM/°C (Typical)	
Power	Supply from 6314A Mainframe		Supply from 6314A Mainframe		Supply from 6314A Mainframe		Supply from 6314A Mainframe	
Dimensions (HxWxD)	172x82x489.5mm / 6.8x3.2x19.3inch		172x82x489.5mm / 6.8x3.2x19.3inch		172x82x489.5mm / 6.8x3.2x19.3inch		172x82x489.5mm / 6.8x3.2x19.3inch	
Weight	4.2 kg / 9.3 lbs		4.2 kg / 9.3 lbs		4.2 kg / 9.3 lbs		4.2 kg / 9.3 lbs	
Operating Range	0~40°C		0~40°C		0~40°C		0~40°C	
EMC & Safety	CE		CE		CE		CE	
Mainframe Model								
Dimensions(HxWxD)	6312A				6314A			
Weight	194x275x550mm / 7.6x10.8x21.7inch				194x439x550mm / 7.6x17.3x21.7inch			
	15 kg / 33.1 lbs				21.5 kg / 47.4 lbs			

All specifications are subject to change without notice. Please visit our website for the most up to date specifications.

continued on next page...

Model	63106A		63107A (30W & 250W)			63108A		63112A	
Power	60W	600W	30W	30W	250W	60W	600W	120W	1200W
Current	0~12A	0~120A	0~5A	0~4A	0~40A	0~2A	0~20A	0~24A	0~240A
Voltage	0~80V		0~80V			0~500V		0~80V	
Typical Min. Operation Voltage (DC)*1	0.4V@6A	0.4V@60A	0.4V@2.5A	0.4V@2A	0.4V@20A	1.0V@1A	1.0V@10A	0.4V@12A	0.4V@120A
	0.8V@12A	0.8V@120A	0.8V@5A	0.8V@4A	0.8V@40A	2.0V@2A	2.0V@20A	0.8V@24A	0.8V@240A
Constant Current Mode									
Range	0~12A	0~120A	0~5A	0~4A	0~40A	0~2A	0~20A	0~24A	0~240A
Resolution	3mA	30mA	1.25mA	1mA	10mA	0.5mA	5mA	6mA	60mA
Accuracy	0.1%+0.1%F.S.		0.1%+0.1%F.S.		0.1%+0.2%F.S.	0.1%+0.1%F.S.		0.1%+0.2%F.S.	
Constant Resistance Mode									
Range	12.5mΩ~50Ω (600W/16V) 0.625Ω~2.5kΩ (600W/80V)		0.3Ω~1.2kΩ (30W/16V) 15Ω~60kΩ (30W/80V)		0.0375Ω~150Ω (250W/16V) 1.875Ω~7.5kΩ (250W/80V)		0.625Ω~2.5kΩ (600W/125V) 25Ω~100kΩ (600W/500V)		6.25mΩ~25Ω (1200W/16V) 0.3125Ω~1.25kΩ (1200W/80V)
Resolution	12 bits		12 bits		12 bits		12 bits		12 bits
Accuracy	50Ω: 0.4% + 0.5% 2.5kΩ: 0.04% + 0.2%		1.2kΩ: 0.1% + 0.2% 60kΩ: 0.01% + 0.1%		150Ω: 0.1% + 0.2% 7.5kΩ: 0.01% + 0.1%		2.5kΩ: 50m% + 0.2% 100kΩ: 5m% + 0.1%		25Ω: 0.8% + 0.8% 1.25kΩ: 0.08% + 0.2%
Constant Voltage Mode									
Range	0~80V		0~80V			0~500V		0~80V	
Resolution	20mV		20mV			125mV		20mV	
Accuracy	0.05% ± 0.1%F.S.		0.05% ± 0.1%F.S.			0.05% ± 0.1%F.S.		0.05% ± 0.1%F.S.	
Constant Power Mode									
Range	0~60W	0~600W	0~30W	0~30W	0~250W	0~60W	0~600W	0~120W	0~1200W
Resolution	15mW	150mW	7.5mW	7.5mW	62.5mW	15mW	150mW	30mW	300mW
Accuracy	0.5% ± 0.5%F.S.		0.5% ± 0.5%F.S.			0.5% ± 0.5%F.S.		0.5% ± 0.5%F.S.	
Dynamic Mode									
Dynamic Mode	C.C. Mode		C.C. Mode			C.C. Mode		C.C. Mode	
T1 & T2	0.025ms ~ 50ms / Res: 5μs 0.1ms ~ 500ms / Res: 25μs 10ms ~ 50s / Res: 2.5ms		0.025ms ~ 50ms / Res: 5μs 0.1ms ~ 500ms / Res: 25μs 10ms ~ 50s / Res: 2.5ms			0.025ms ~ 50ms / Res: 5μs 0.1ms ~ 500ms / Res: 25μs 10ms ~ 50s / Res: 2.5ms		0.025ms ~ 50ms / Res: 5μs 0.1ms ~ 500ms / Res: 25μs 10ms ~ 50s / Res: 2.5ms	
Accuracy	1μs/1ms+100ppm		1μs/1ms+100ppm			1μs/1ms+100ppm		1μs/1ms+100ppm	
Slew Rate	0.002~0.5A/μs	0.02~5A/μs	0.8~200mA/μs	0.64~160mA/μs	6.4~1600mA/μs	0.32~80mA/μs	3.2~800mA/μs	0.004~1A/μs	0.04~10A/μs
Resolution	0.002A/μs	0.02A/μs	0.8mA/μs	0.64mA/μs	6.4mA/μs	0.32mA/μs	3.2mA/μs	0.004A/μs	0.04A/μs
Min. Rise Time	10μs (Typical)		10μs (Typical)			24μs (Typical)		10μs (Typical)	
Current	0~12A	0~120A	0~5A	0~4A	0~40A	0~2A	0~20A	0~24A	0~240A
Resolution	3mA	30mA	1.25mA	1mA	10mA	0.5mA	5mA	6mA	60mA
Current Accuracy	0.4%F.S.		0.4%F.S.			0.4%F.S.		0.4%F.S.	
Measurement Section									
Voltage Read Back									
Range	0~16V	0~80V	0~16V	0~80V	0~16V	0~80V	0~125V	0~500V	0~16V
Resolution	0.25mV	1.25mV	0.25mV	1.25mV	0.25mV	1.25mV	2mV	8mV	0.25mV
Accuracy	0.025% + 0.025%F.S.		0.025% + 0.025%F.S.			0.025% + 0.025%F.S.		0.025% + 0.025%F.S.	
Current Read Back									
Range	0~12A	0~120A	0~5A	0~4A	0~40A	0~2A	0~20A	0~24A	0~240A
Resolution	0.1875mA	1.875mA	0.078125mA	0.0625mA	0.625mA	0.03125mA	0.3125mA	0.375mA	3.75mA
Accuracy	0.05% + 0.05%F.S.		0.05% + 0.05%F.S.			0.05% + 0.05%F.S.		0.075% + 0.075%F.S.	
Power Read Back*2									
Range	0~60W	0~600W	0~30W	0~30W	0~250W	0~60W	0~600W	0~120W	0~1200W
Accuracy	0.1% + 0.1%F.S.		0.1% + 0.1%F.S.			0.1% + 0.1%F.S.		0.1% + 0.1%F.S.	
Protective Section									
Over Power Protection	≒ 62.4W	≒ 624W	≒ 31.2W	≒ 31.2W	≒ 260W	≒ 62.4W	≒ 624W	≒ 124.8W	≒ 1248W
Over Current Protection	≒ 12.24A	≒ 122.4A	≒ 5.1A	≒ 4.08A	≒ 40.8A	≒ 2.04A	≒ 20.4A	≒ 24.48A	≒ 244.8A
Over Temperature Protection	≒ 85°C		≒ 85°C			≒ 85°C		≒ 85°C	
Over Voltage Protection	≒ 81.6V		≒ 81.6V			≒ 510V		≒ 81.6V	
General									
Short Circuit									
Current (CC)	-	≒ 120A	-	-	≒ 40A	-	≒ 20A	-	≒ 240A
Voltage (CV)	-	0V	-	-	0V	-	0V	-	0V
Resistance (CR)	-	≒ 0.0125Ω	-	-	≒ 0.0375Ω	-	≒ 0.625Ω	-	≒ 0.00625Ω
Power (CP)	-	≒ 600W	-	-	≒ 250W	-	≒ 600W	-	≒ 1200W
Input Resistance (Load Off)	100kΩ (Typical)		100kΩ (Typical)			100kΩ (Typical)		100kΩ (Typical)	
Temperature Coefficient	100PPM/°C (Typical)		100PPM/°C (Typical)			100PPM/°C (Typical)		100PPM/°C (Typical)	
Power	Supply from 6314A Mainframe		Supply from 6314A Mainframe			Supply from 6314A Mainframe		Supply from 6314A Mainframe	
Dimensions (HxWxD)	172x164x489.5mm / 6.8x6.5x19.3inch		172x82x489.5mm / 6.8x3.2x19.3inch			172x164x489.5mm / 6.8x6.5x19.3inch		172x329x495mm / 6.8x12.9x19.5inch	
Weight	7.3 kg / 16.1 lbs		4.5 kg / 9.9 lbs			7.3 kg / 16.1 lbs		14 kg / 30.8 lbs	
Operating Range	0~40°C		0~40°C			0~40°C		0~40°C	
EMC & Safety	CE		CE			CE		CE	

All specifications are subject to change without notice. Please visit our website for the most up to date specifications.

NOTE*1 : Low voltage operation, under 0.8 volt, is possible at correspondingly reduced current level.

Operating temperature range is 0°C to 40°C. All specifications apply for 25°C±5°C, except as noted.

NOTE*2 : Power F.S. = Vrange F.S. x Irange F.S.

Developed and Manufactured by :

CHROMA ATE INC.

致茂電子股份有限公司

HEADQUARTERS

No. 66, Hwa-Ya 1st Rd.,

Hwa-Ya Technology Park,

Kuei-Shan Hsiang, 33383

Taoyuan County, Taiwan

Tel: +886-3-327-9999

Fax: +886-3-327-8898

http://www.chromaate.com

CHINA

CHROMA ELECTRONICS

(SHENZHEN) CO., LTD.

8F, No. 4, Nanyou Tian An

Industrial Estate, Shenzhen,

China PC: 518052

Tel: +86-755-2664-4598

Fax: +86-755-2641-9620

JAPAN

CHROMA JAPAN CORP.

NARA Building 11F 2-2-8

Shinyokohama, Kouhokukku,

Yokohama-shi, Kanagawa,

222-0033 Japan

Tel: +81-45-470-2285

Fax: +81-45-470-2287

http://www.chroma.co.jp

U.S.A.

CHROMA SYSTEMS

SOLUTIONS, INC.

25612 Commercentre Drive,

Lake Forest, CA 92630-8830

Tel: +1-949-600-6400

Fax: +1-949-600-6401

Toll Free: +1-866-600-6050

http://www.chromausa.com

E-mail: sales@chromausa.com

EUROPE

CHROMA ATE EUROPE B.V.

Morsestraat 32, 6716 AH Ede,

The Netherlands

Tel: +31-318-648282

Fax: +31-318-648288

http://www.chroma.eu.com

E-mail: sales@chromaeu.com

Distributed by:

Worldwide Distribution and Service Network

6310A-E-200907-2000