



160 School House Road, Souderton, PA 18964-9990 USA  
Phone 215-723-8181•FAX 215-723-5688


**MODEL 2000TP8G12**  
**2000 WATTS PULSE**  
**8.2 – 12.4 GHz**

The Model 2000TP8G12 is a self contained, forced air cooled, broadband traveling wave tube (TWT) microwave amplifier designed for pulse applications at low to moderate duty factors where instantaneous bandwidth and high gain are required. A reliable TWT provides a conservative 2000 watts minimum peak RF pulse power at the amplifier output connector. Stated power specifications are at the fundamental frequency.

The amplifier's front panel digital display shows forward and reflected average power output or forward and reflected peak power, plus extensive system status information accessed through a series of menus via soft keys. Status indicators include power on, warm-up, standby, operate, faults, excess average or peak reflected power warning and remote. Standard features include a built-in IEEE-488 (GPIB) interface, 0dBm input, TTL Gating, VSWR protection, gain control, RF output sample port, auto sleep, plus monitoring of TWT helix current, cathode voltage, collector voltage, heater current, heater voltage, baseplate temperature and cabinet temperature. Modular design of the power supply and RF components allow for easy access and repair. Use of a switching mode power supply results in significant weight reduction.

Housed in a stylish contemporary cabinet, the Model 2000TP8G12 provides readily available pulsed RF power for a variety of applications in Test and Measurement, (including EMC RF pulse susceptibility testing), Industrial and University Research and Development, and Service applications. AR also offers a broad range of amplifiers for CW (Continuous Wave) applications.

**2000TP8G12 TYPICAL POWER OUTPUT**

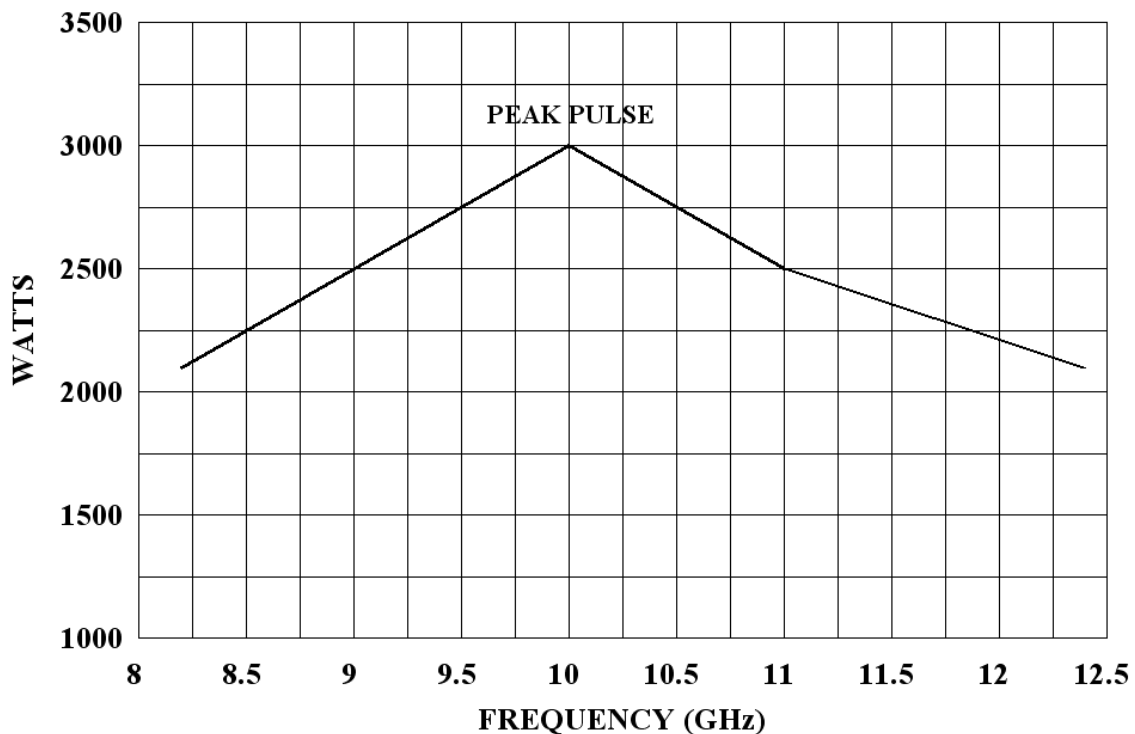

# SPECIFICATIONS

## Model 2000TP8G12

**POWER (fundamental), PEAK PULSE, @ OUTPUT CONNECTOR**

Nominal..... 2500 watts  
 Minimum..... 2000 watts

FLATNESS ..... ±13 dB maximum, equalized for  
 ±3dB maximum at rated power

FREQUENCY RESPONSE..... 8.2 – 12.4 GHz instantaneously

INPUT FOR RATED OUTPUT..... 1.0 milliwatt maximum

GAIN (at maximum setting)..... 63 dB minimum

GAIN ADJUSTMENT (continuous range)..... 35 dB minimum

INPUT IMPEDANCE..... 50 ohms, VSWR 2.5:1 maximum

OUTPUT IMPEDANCE..... 50 ohms, VSWR 2.5:1 typical

MISMATCH TOLERANCE..... Output pulse width foldback protection at peak reflected power exceeding 1000 watts. Will operate without damage or oscillation with any magnitude and phase of source and load impedance. May oscillate with unshielded open due to coupling to input. Should not be tested with connector off.

**PULSE CAPABILITY**

Pulse Width..... 0.07 – 30 microseconds.  
 Pulse Rate (PRF)..... 100kHz maximum.  
 Duty Cycle..... 4% maximum.  
 RF Rise and Fall..... 30 ns max (10% to 90%).  
 Delay..... 300 ns maximum from pulse input to RF 90%  
 Pulse Width Distortion..... ±30ns max (50% point of output pulse width compared to 50% points of input pulse width).  
 Pulse Off Isolation..... 80dB minimum, 90dB typical

NOISE POWER DENSITY (pulse on)..... Minus 70 dBm/Hz (maximum), minus 75dBm/Hz (typical)  
 (pulse off)..... Minus 140 dBm/Hz (typical)

HARMONIC DISTORTION..... \*Minus 8dBc maximum, Minus 10dBc typical

PRIMARY POWER..... 190 – 260VAC, single phase  
 50/60 Hz  
 2.0 KVA maximum

**CONNECTORS**

RF input..... Type N female on rear panel  
 RF output..... \*\*Type WRD 750D24 waveguide flange  
 RF output sample port..... Type N female  
 Pulse input..... Type BNC female on rear panel  
 GPIB..... IEEE-488 female on rear panel  
 Interlock..... DB-15 female on rear panel

COOLING..... Forced air (self contained fans), air entry and exit in rear.

WEIGHT..... 68 kg (150 lb)

SIZE (WxHxD)..... 50.3 x 31.1 x 77.5 cm  
 19.8 x 12.25 x 30.5 in

\* Contact Amplifier Research for alternative harmonic specifications.

\*\* Contact Amplifier Research for alternative waveguide output types.