




160 School House Road, Souderton, PA 18964-9990 USA
Phone 215-723-8181 • FAX 215-723-5688

MODEL 10,000L
10,000 WATTS CW
10 kHz - 100 MHz

The Model 10,000L is a self-contained, broadband amplifier designed for laboratory applications where broad frequency range, high gain, and high power output are required. The combination of a high power internal load, specially designed, protective circuitry, and rugged liquid cooled tetrodes provides a truly high power broadband amplifier capable of driving any load impedance without power foldback or fear of damage. A rear panel mounted connector is provided for remote control of the POWER, STANDBY, and OPERATE functions. When connected to our CP2001 or CP3000, these functions may be accomplished by TTL or IEEE bus. A continuously variable input attenuator permits the operator to adjust the output level as desired. AR model DC4000 dual directional coupler is available to permit monitoring of forward and reflected power levels.

10,000L TYPICAL POWER OUTPUT

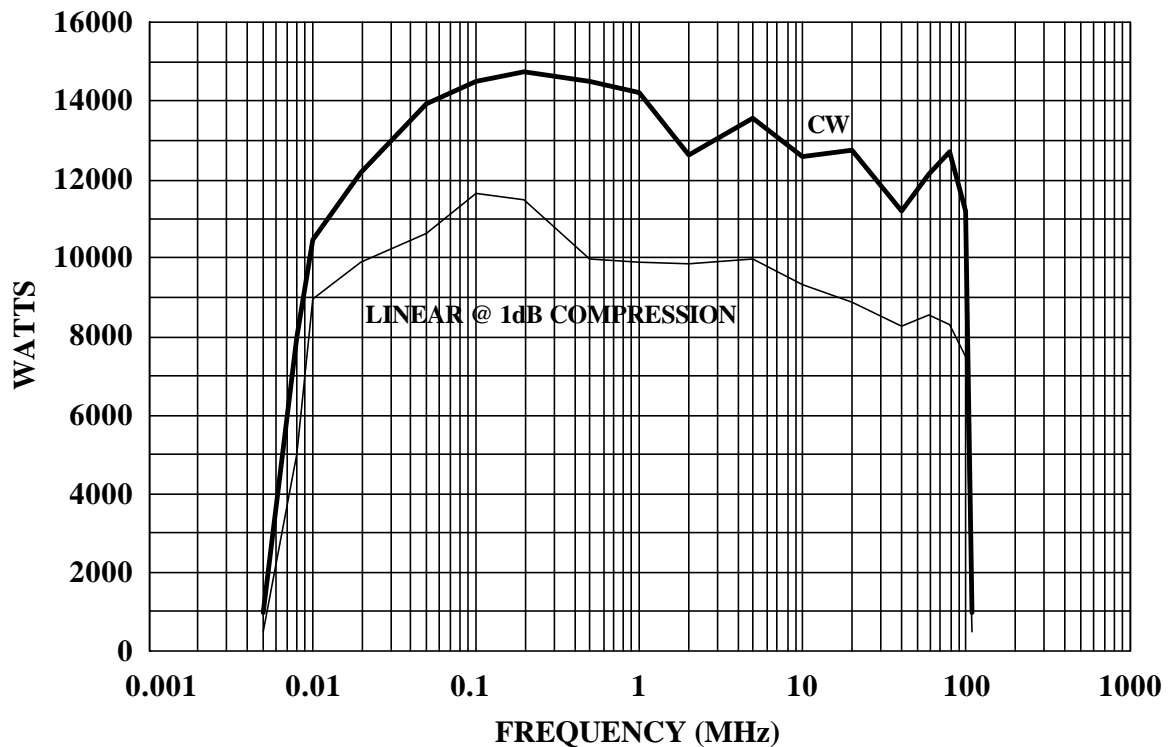

SPECIFICATIONS

Model 10,000L

POWER OUTPUT, CW

Nominal.....	12,600 watts
Minimum	10,000 watts
Linear @ 1dB compression	7500 watts minimum

FLATNESS ±1.5 dB

FREQUENCY RESPONSE..... 10 kHz - 100 MHz

INPUT FOR RATED OUTPUT..... 1.0 milliwatt maximum

GAIN (at maximum setting)..... 70 dB minimum

GAIN ADJUSTMENT (continuous range)..... 18 dB minimum

INPUT IMPEDANCE..... 50 ohms, VSWR 1.5:1 maximum

OUTPUT IMPEDANCE..... 50 ohms, nominal

MISMATCH TOLERANCE* 100% of rated power without foldback. Will operate without damage, or oscillation with any magnitude and phase of source and load impedance.

MODULATION CAPABILITY Will faithfully reproduce AM, FM, or pulse modulation appearing on the input signal

HARMONIC DISTORTION Minus 15 dBc maximum at 7500 watts

BLANKING CHARACTERISTICS

Signal (into 50 ohms)..... Plus 4.0 to 6.0 VDC

Delay time

Signal on to RF off..... 5 microseconds maximum

Signal off to RF on..... 25 microseconds maximum

RF rise/fall time..... 10 nanoseconds maximum

PRIMARY POWER (specify one)..... 200/208 ±5% VAC, 3 phase, 60 Hz
380/415 ±5% VAC, 3 phase, 50/60 Hz
75 kVA maximum

CONNECTORS

RF input..... Type BNC female on front panel

RF output..... Type EIA 1 5/8 on rear panel (male)

Blanking Type BNC female on front panel

Remote control..... 25 pin female subminiature D on rear panel

COOLING..... Tap water, 20-30 LPM (6-8 GPM)
at 20° C maximum

WEIGHT (amplifier/heat exchanger)..... 1134 kg (2500 lb)

SIZE (WxHxD) two racks, each..... 68.8 x 149.9 x 82.6 cm
27.1 x 59.0 x 32.5 in

* See Application Note #27

Installation drawing 1002600 available upon request