

# Agilent PXI Digital Multimeters

6½ Digit, High Performance  
M9182A  
M9183A

Data Sheet



- 6½ digit resolution
- High throughput: up to 15,000 rdgs/sec, 66 µs single reading interval
- DCV basic one year accuracy: 40 ppm
- Ten standard measurements: DCV, ACV, DCI, ACI, 2- and 4-wire resistance, frequency, period, capacitance, and temperature

**Discover** the Alternatives...

... Agilent **Modular** Products



**Agilent Technologies**

# OVERVIEW

Agilent's M9182A and M9183A 6½ digit high performance PXI digital multimeters (DMMs) offer fast throughput, flexible measurements, and trustworthy results. The M9182A provides ten built-in measurement types with all the accuracy and stability you would expect from an Agilent 6½ digit DMM. The M9183A provides the same capabilities as the M9182A, with market-leading measurement speed of up to 15,000 readings per second, additional ranges, and a DC source.

## Industries and Applications

- Aerospace and defense
- Automotive electronics test
- Industrial electronics test
- Medical device test
- Semiconductor and component test



## M9182A and M9183A Feature Summary

DMM	Description	Type # slots	Resolution	Maximum reading rate at 4½ digits	Voltage and current	Resistance, temperature, capacitance	Other measurements	DC source
M9182A	High performance PXI DMM	PXI x1	6½ digits	4,500 rdgs/sec	DCV, DCI, ACV, ACI	2- and 4-wire Ω, temperature, capacitance	Frequency, period	n/a
M9183A	Enhanced performance PXI DMM	PXI x1	6½ digits	15,000 rdgs/sec	DCV, DCI, ACV, ACI	2- and 4-wire Ω, offset compensated ohms, temperature, capacitance	Frequency, period, pulse width and duty cycle, totalizer/event counter	± 10 V ±(1.2 μA to 12 mA)

## Features

- 6½ digit resolution
- Up to 15,000 readings per second, 66 µs single reading interval time (M9183A)
- Up to 4,500 readings per second (M9182A)
- Basic 1 year DCV accuracy of 40 ppm, 90 day accuracy of 30 ppm
- DCV, ACV, DCI, ACI, 2- and 4-wire resistance, frequency, period, capacitance, and temperature
- Pulse width, duty cycle, and totalizer/event counter (M9183A)
- DC voltage and current source (M9183A)
- External trigger in and DMM out, to synchronize with external multiplexers and instruments
- Advanced triggering
- Floating isolation (Cat II) to 300 Vrms
- Software drivers to support most common programming environments
- PXI form factor
- Chassis connector compatibility: PXI-1 (J-1 only), PXIe hybrid slot

## Customer Values

- Measurements you can trust
- Higher throughput due to the lowest latency, saves test time
- Application development in the environment of your choice reduces development time
- Fast and easy installation and configuration
- Customer supportable calibration procedures as well as calibration services available from Agilent

# EASY SETUP... TEST... AND MAINTENANCE

## Hardware Platform

### Compliance

The M9182A and M9183A 6½ digit DMMs are PXI compliant, using either a cPCI (J1), PXI-1 (J1) or PXIe Hybrid slot. Designed to benefit from fast data interfaces, an M9182A or M9183A DMM can be integrated with other test and automation modules in a PXI, CompactPCI, or Hybrid chassis. The PXI format offers high performance in a small, rugged package. It is an ideal deployment platform for many automated test systems. A wide array of complementary PXI products are currently available. Products from Agilent include switches, multiplexers, digitizers, waveform generators, and local oscillators.

## Software Platform

### IO Libraries Suite

Agilent IO Libraries Suite offers fast and easy instrument connections and now extends to modular instruments. IO Libraries Suite 16.1 supports PXI, helping you display all of the modules in your system, view information about installed software and allows you to more easily find the right driver and start module soft front panels directly with Agilent Connection Expert.

National Instruments IO libraries are also supported, and may be used along with Agilent IO libraries.

### Drivers

Agilent's digital multimeters come complete with software drivers for Windows® XP, Windows Vista, and Windows 7. These software drivers work in the most popular test and measurement development environments including: LabVIEW, Visual Studio® (C, C++, C#, Visual Basic) and MATLAB.

### Easy software integration

Application code examples are included for LabVIEW, Visual Basic, C/C++, C#, and MATLAB – demonstrating DMM set up and basic functionality. These application code examples can be used to help you integrate the DMM module into your measurement system.

### Soft front panel

The Agilent soft front panel provides easy to use instrument control. The M9182A and M9183A graphical user interface guides developers through module setup so users can quickly configure the DMM.

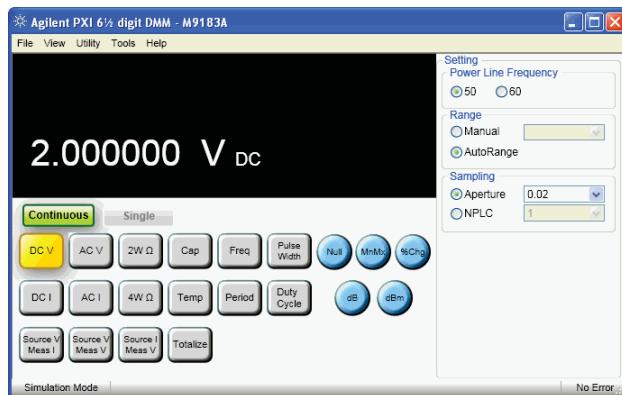


Figure 1. M9183A soft front panel

One notable feature of the soft front panel is the Driver Call Log which allows the user to see the driver calls for each button pushed. The user can then incorporate the driver calls into their application program – enabling fast and easy program development.

### Calibration

Each M9182A and M9183A DMM is factory calibrated and shipped with an ISO-9002, NIST-traceable calibration certificate.

Calibration is required once per year. A documented calibration process allows you to do in-rack calibration using standard calibration sources. Alternatively, Agilent and 3rd party calibration labs offer calibration services for the M9182A and M9183A DMMs.

# TECHNICAL SPECIFICATIONS AND CHARACTERISTICS

M9182A and M9183A: Accuracy specifications  $\pm$ (% of reading + % of range)<sup>1,2</sup>

Function	Range <sup>3</sup>	Frequency	24 hour 23 °C ± 1 °C	90 day 23 °C ± 5 °C	1 year 23 °C ± 5 °C
DC voltage	200.0000 mV		0.0030 + 0.0005	0.0040 + 0.0008	0.0050 + 0.0010
	2.000000 V		0.0020 + 0.0002	0.0030 + 0.0002	0.0040 + 0.0003
	20.00000 V		0.0040 + 0.0006	0.0050 + 0.0007	0.0070 + 0.0008
	200.0000 V		0.0030 + 0.0002	0.0040 + 0.0001	0.0050 + 0.0003
	300.0000 V		0.0130 + 0.0002	0.0230 + 0.0003	0.0250 + 0.0003
True RMS, AC voltage <sup>4,5</sup> (Fast RMS off)	200.0000 mV <sup>6</sup>	10 Hz - 20 Hz	3.00 + 0.18	3.10 + 0.19	3.20 + 0.22
		20 Hz - 47 Hz	0.37 + 0.08	0.38 + 0.09	0.40 + 0.10
		47 Hz - 10 kHz	0.13 + 0.05	0.14 + 0.06	0.15 + 0.06
		10 kHz - 50 kHz	0.25 + 0.08	0.26 + 0.10	0.27 + 0.12
		50 kHz - 100 kHz	1.90 + 0.18	1.95 + 0.19	2.00 + 0.20
	2.000000 V	10 Hz - 20 Hz	3.00 + 0.10	3.10 + 0.11	3.20 + 0.13
		20 Hz - 47 Hz	0.37 + 0.07	0.38 + 0.08	0.40 + 0.09
		47 Hz - 10 kHz	0.05 + 0.05	0.06 + 0.06	0.07 + 0.06
		10 kHz - 50 kHz	0.32 + 0.06	0.33 + 0.66	0.35 + 0.08
		50 kHz - 100 kHz	1.90 + 0.08	2.00 + 0.09	2.10 + 0.10
	20.00000 V	10 Hz - 20 Hz	3.00 + 0.07	3.10 + 0.08	3.30 + 0.10
		20 Hz - 47 Hz	0.37 + 0.06	0.38 + 0.07	0.40 + 0.08
		47 Hz - 10 kHz	0.06 + 0.05	0.07 + 0.06	0.07 + 0.07
		10 kHz - 50 kHz	0.18 + 0.09	0.20 + 0.11	0.22 + 0.13
		50 kHz - 100 kHz	1.30 + 0.15	1.40 + 0.18	1.50 + 0.20
	200.0000 V & 300.0000 V	10 Hz - 20 Hz	3.00 + 0.07	3.10 + 0.08	3.30 + 0.08
		20 Hz - 47 Hz	0.43 + 0.06	0.44 + 0.07	0.45 + 0.08
		47 Hz - 10 kHz	0.07 + 0.05	0.08 + 0.07	0.09 + 0.08
		10 kHz - 50 kHz	0.28 + 0.07	0.30 + 0.08	0.32 + 0.10
		50 kHz - 100 kHz	1.30 + 0.09	1.60 + 0.12	2.40 + 0.13
True RMS, AC voltage <sup>4,5</sup> (Fast RMS on)	200.0000 mV <sup>6</sup>	350 Hz - 800 Hz	0.60 + 0.08	0.65 + 0.09	0.70 + 0.10
		800 Hz - 10 kHz	0.13 + 0.05	0.14 + 0.06	0.15 + 0.06
		10 kHz - 50 kHz	0.55 + 0.08	0.60 + 0.10	0.63 + 0.12
		50 kHz - 100 kHz	5.30 + 0.18	5.40 + 0.19	5.60 + 0.20
	2.000000 V	350 Hz - 800 Hz	0.93 + 0.07	0.96 + 0.08	1.00 + 0.09
		800 Hz - 10 kHz	0.07 + 0.05	0.08 + 0.06	0.08 + 0.06
		10 kHz - 50 kHz	0.62 + 0.06	0.65 + 0.66	0.70 + 0.08
		50 kHz - 100 kHz	5.10 + 0.08	5.20 + 0.09	5.30 + 0.10
	20.00000 V	350 Hz - 800 Hz	0.93 + 0.06	0.96 + 0.07	1.00 + 0.08
		800 Hz - 10 kHz	0.07 + 0.05	0.07 + 0.06	0.07 + 0.07
		10 kHz - 50 kHz	0.31 + 0.09	0.33 + 0.11	0.35 + 0.13
		50 kHz - 100 kHz	2.00 + 0.15	2.20 + 0.18	2.40 + 0.20
	200.0000 V & 300.0000 V	350 Hz - 800 Hz	1.00 + 0.06	1.10 + 0.07	1.10 + 0.08
		800 Hz - 10 kHz	0.07 + 0.05	0.07 + 0.07	0.08 + 0.08
		10 kHz - 50 kHz	0.34 + 0.07	0.45 + 0.08	0.50 + 0.10
		50 kHz - 100 kHz	2.50 + 0.09	2.80 + 0.12	3.20 + 0.13

# TECHNICAL SPECIFICATIONS AND CHARACTERISTICS

M9182A and M9183A: Accuracy specifications  $\pm$ (% of reading + % of range)<sup>1,2</sup>

Function	Range <sup>3</sup>	Frequency, test current or burden voltage	24 hour $23^\circ\text{C} \pm 1^\circ\text{C}$	90 day $23^\circ\text{C} \pm 5^\circ\text{C}$	1 year $23^\circ\text{C} \pm 5^\circ\text{C}$
Resistance <sup>7</sup>	20.00000 $\Omega$ (M9183A only)	10 mA	0.004 + 0.004	0.009 + 0.004	0.014 + 0.005
	200.0000 $\Omega$	1 mA	0.004 + 0.002	0.010 + 0.002	0.013 + 0.003
	2.000000 k $\Omega$	1 mA	0.003 + 0.002	0.008 + 0.002	0.012 + 0.002
	20.00000 k $\Omega$	100 $\mu\text{A}$	0.003 + 0.002	0.008 + 0.002	0.012 + 0.002
	200.0000 k $\Omega$	10 $\mu\text{A}$	0.006 + 0.002	0.010 + 0.002	0.016 + 0.003
	2.000000 M $\Omega$	1 $\mu\text{A}$	0.018 + 0.002	0.030 + 0.003	0.040 + 0.004
	20.00000 M $\Omega$	100 nA	0.120 + 0.002	0.130 + 0.003	0.200 + 0.003
	200.0000 M $\Omega$ (M9183A , 2-wire only)	4 nA	0.800 + 0.013	1.000 + 0.015	1.300 + 0.025
DC current	200.0000 nA (M9183A only)	< 100 $\mu\text{V}$	0.130 + 0.020	0.160 + 0.023	0.170 + 0.030
	2.000000 $\mu\text{A}$ (M9183A only)	< 100 $\mu\text{V}$	0.050 + 0.004	0.080 + 0.003	0.210 + 0.008
	20.00000 $\mu\text{A}$ (M9183A only)	< 100 $\mu\text{V}$	0.050 + 0.002	0.080 + 0.003	0.130 + 0.004
	200.0000 $\mu\text{A}$ (M9183A only)	< 2.5 mV	0.052 + 0.100	0.070 + 0.150	0.100 + 0.200
	2.000000 mA	< 25 mV	0.020 + 0.015	0.030 + 0.020	0.040 + 0.028
	20.00000 mA	< 250 mV	0.020 + 0.002	0.035 + 0.003	0.045 + 0.003
	200.0000 mA	< 55 mV	0.020 + 0.025	0.030 + 0.030	0.040 + 0.040
	2.000000 A	< 520 mV	0.100 + 0.003	0.150 + 0.004	0.200 + 0.005
True RMS, AC current <sup>8</sup>	2.000000 mA <sup>9</sup>	10 Hz - 20 Hz	2.70 + 0.20	2.90 + 0.20	2.90 + 0.20
		20 Hz - 47 Hz	0.90 + 0.20	0.90 + 0.20	1.00 + 0.20
		47 Hz - 1 kHz	0.04 + 0.08	0.08 + 0.15	0.12 + 0.20
		1 kHz - 10 kHz	0.12 + 0.20	0.14 + 0.20	0.22 + 0.20
	20.00000 mA	10 Hz - 20 Hz	1.80 + 0.15	2.60 + 0.15	2.80 + 0.15
		20 Hz - 47 Hz	0.60 + 0.15	0.90 + 0.15	1.00 + 0.15
		47 Hz - 1 kHz	0.07 + 0.05	0.15 + 0.10	0.16 + 0.15
		1 kHz - 10 kHz	0.21 + 0.15	0.30 + 0.20	0.40 + 0.20
	200.0000 mA	10 Hz - 20 Hz	1.80 + 0.20	2.70 + 0.20	2.80 + 0.20
		20 Hz - 47 Hz	0.60 + 0.20	0.90 + 0.20	1.00 + 0.20
		47 Hz - 1 kHz	0.15 + 0.08	0.17 + 0.09	0.20 + 0.11
		1 kHz - 10 kHz	0.30 + 0.15	0.35 + 0.18	0.40 + 0.20
	2.000000 A	10 Hz - 20 Hz	1.80 + 0.20	2.50 + 0.23	2.70 + 0.25
		20 Hz - 47 Hz	0.66 + 0.30	0.80 + 0.30	0.90 + 0.30
		47 Hz - 1 kHz	0.30 + 0.19	0.33 + 0.19	0.35 + 0.20
		1 kHz - 10 kHz	0.40 + 0.20	0.45 + 0.23	0.50 + 0.25
Frequency or period <sup>10, 14</sup>	200 mV to 300 V	1Hz - 20 Hz	0.075 + 0.003	0.075 + 0.003	0.075 + 0.003
		20 Hz - 130 Hz	0.025 + 0.002	0.025 + 0.002	0.025 + 0.002
		130 Hz - 640 Hz	0.025 + 0.003	0.025 + 0.003	0.025 + 0.003
		640 Hz - 2.5 kHz	0.030 + 0.003	0.030 + 0.003	0.030 + 0.003
		2.5 kHz - 40 kHz	0.030 + 0.003	0.030 + 0.003	0.030 + 0.003
		40 kHz - 200 kHz	0.050 + 0.004	0.050 + 0.004	0.050 + 0.004
		200 kHz - 300 kHz	0.070 + 0.002	0.070 + 0.002	0.070 + 0.002

# TECHNICAL SPECIFICATIONS AND CHARACTERISTICS

M9182A and M9183A: Accuracy specifications $\pm$ (% of reading + % of range) <sup>1,2</sup>					
Function	Range	Full scale reading or resolution	24 hour 23 °C $\pm$ 1 °C	90 day 23 °C $\pm$ 5 °C	1 year 23 °C $\pm$ 5 °C
Single shot duty cycle <sup>11</sup> [M9183A only]	2 - 100 Hz	0.02 %	0.03 $\pm$ 0.03	0.03 $\pm$ 0.03	0.03 $\pm$ 0.03
	100 Hz - 1 kHz	0.20 %	0.03 $\pm$ 0.30	0.03 $\pm$ 0.30	0.03 $\pm$ 0.30
	1 - 10 kHz	2.00 %	0.03 $\pm$ 3.00	0.03 $\pm$ 3.00	0.03 $\pm$ 3.00
Single shot pulse width <sup>12, 14</sup> [M9183A only]	14 $\mu$ s - 62.5 ms	1 $\mu$ s	.01 $\pm$ 4 $\mu$ s	01 $\pm$ 4 $\mu$ s	01 $\pm$ 4 $\mu$ s
Capacitance <sup>13</sup> [M9183A and M9182A]	1000.0 pF	1199.9 pF	1.00 $\pm$ 0.10	1.00 $\pm$ 0.10	1.00 $\pm$ 0.10
	10.000 nF	11.999 nF	1.20 $\pm$ 0.05	1.20 $\pm$ 0.05	1.20 $\pm$ 0.05
	100.00 nF	119.99 nF	1.00 $\pm$ 0.10	1.00 $\pm$ 0.10	1.00 $\pm$ 0.10
	1.0000 $\mu$ F	1.1999 $\mu$ F	1.00 $\pm$ 0.10	1.00 $\pm$ 0.10	1.00 $\pm$ 0.10
	10.000 $\mu$ F	11.999 $\mu$ F	1.00 $\pm$ 0.10	1.00 $\pm$ 0.10	1.00 $\pm$ 0.10
	100.00 $\mu$ F	119.99 $\mu$ F	1.00 $\pm$ 0.10	1.00 $\pm$ 0.10	1.00 $\pm$ 0.10
	1.0000 mF	1.1999 mF	1.20 $\pm$ 0.10	1.20 $\pm$ 0.10	1.20 $\pm$ 0.10
	10.000 mF	11.999 mF	2.00 $\pm$ 0.10	2.00 $\pm$ 0.10	2.00 $\pm$ 0.10

1. Specifications are for 1 hour warm up, within 1 hour self-cal, aperture  $\geq$  0.5 sec, slow AC filter.

2. For temperatures outside the range of 23 °C  $\pm$  5 °C, but within 0 °C to 50 °C, add 0.1  $\times$  accuracy specification per °C.

3. 20% over range on all ranges except 300 V range, 10% over range for 300 V range.

4. Minimum input specified: 5 mV or 1% of range, whichever is larger.

5. Signal is limited to  $8 \times 10^6$  Volt Hz product. For example, at 32 kHz, the highest input is 250 V.

6. For inputs from 5 mV to 15 mV, add 100  $\mu$ V to the specification.

7. Specifications are for 4-wire resistance measurements, for 2-wire, add 1 mΩ additional error to the specification; for offset compensated ohms (M9183A only), add 0.02% of range.

8. Minimum input specified: 60  $\mu$ A or 1.5% of range, whichever is larger; for inputs < 5% of full scale, add 0.02% of range.

9. For inputs from 60 to 120  $\mu$ A, add 10  $\mu$ A to the specification; for inputs < 5% of full scale, add 0.1% of range.

10. Minimum amplitude greater of: 100 mV, or 5 % of range for 1 Hz to 2.5 kHz, or 25 % of range for 2.5 kHz to 200 kHz, or 40% of range for 200 kHz to 300 kHz.

11. Specifications are % of reading (0.03)  $\pm$  adder.

12. Specifications are % of reading + time.

13. Specifications apply to input signals  $\geq$  5% of range.

14. Maximum wait time for duty cycle and period is 5 seconds.

## Definitions for specifications

**Specification (spec):** Represents warranted performance of a calibrated instrument that has been stored for a minimum of two hours within the operating temperature range of 0 to 55 °C, unless otherwise stated, and after a one hour warm-up period. The specifications include measurement uncertainty. Data represented in this document are specifications unless otherwise noted.

**Typical (typ):** Represents characteristic performance, which 80% of the instruments manufactured will meet. This data is not warranted, does not include measurement uncertainty, and is valid only at room temperature (approximately 25 °C).

**Nominal (nom):** The expected mean or average performance, or an attribute whose performance is by design, such as the 50 Ω connector. This data is not warranted and is measured at room temperature (approximately 25 °C).

**Measured (meas):** An attribute measured during the design phase for purposes of communicating expected performance, such as amplitude drift vs. time. This data is not warranted and is measured at room temperature (approximately 25 °C).

**Note:** All graphs contain measured data from several units at room temperature unless otherwise noted.

# TECHNICAL SPECIFICATIONS AND CHARACTERISTICS

M9182A and M9183A Sensitivity (nom)					
Function		Lowest Range	Sensitivity		
DCV		200.0000 mV	0.1 µV		
ACV		200.0000 mV	0.1 µV		
Resistance (M9183A)		20.00000 Ω	10 µΩ		
Resistance (M9182A)		200.0000 Ω	100 µΩ		
DCI (M9183A)		200.0000 nA	0.1 pA		
DCI (M9182A)		2.000000 mA	10 nA		
ACI		2.000000 mA	1 nA		
Capacitance		1000.0 pF	0.1 pF		

M9182A and M9183A temperature accuracy (spec) <sup>1</sup>					
Temperature function	Type	R <sub>0</sub> (Ω)	Sensitivity	Range/max temperature	1 year
RTD temperature measurement <sup>2,3</sup>	pt385	100 Ω, 200 Ω	0.01 °C	-150 to 650 °C	± 0.06 °C
		500 Ω, 1 kΩ	0.01 °C	-150 to 650 °C	± 0.03 °C
	Cu (Copper)	Less than 12 Ω	0.01 °C	-100 to 200 °C	± 0.18 °C at ≤ 20 °C ± 0.05 °C otherwise
		Higher than 90 Ω	0.01 °C	-100 to 200 °C	± 0.10 °C at ≤ 20 °C ± 0.05 °C otherwise
Thermocouple temperature measurement <sup>4,5</sup>	B	NA	0.01 °C	2200 °C	± 0.38 °C
	E	NA	0.01 °C	1200 °C	± 0.035 °C
	J	NA	0.01 °C	2000 °C	± 0.06 °C
	K	NA	0.01 °C	3000 °C	± 0.07 °C
	N	NA	0.01 °C	3000 °C	± 0.10 °C
	R	NA	0.01 °C	2700 °C	± 0.25 °C
	S	NA	0.01 °C	3500 °C	± 0.35 °C
	T	NA	0.01 °C	550 °C	± 0.06 °C
Thermistor <sup>3</sup>	2.25 kΩ	NA	0.01 °C	-80 to 150 °C	± 0.1 °C
	5 kΩ	NA	0.01 °C	-80 to 150 °C	± 0.1 °C
	10 kΩ	NA	0.01 °C	-80 to 150 °C	± 0.1 °C

1. Specifications are for one hour warm up, within one hour self-cal, aperture ≥ 0.5 sec, slow AC filter.

2. 4-wire RTD measurement, R<sub>0</sub> variable 1 Ω to 7 k Ω.

3. For total measurement accuracy, add temperature probe error.

4. For total measurement accuracy, add thermocouple error and cold junction compensation.


5. DMM linearization temperature range may be greater than that of the thermocouple device.

# TECHNICAL SPECIFICATIONS AND CHARACTERISTICS

## Source-Measure [(spec) unless otherwise stated)]

M9183A source DC voltage, measure DC voltage		
Parameter	Extended resolution	Basic resolution
DC voltage source (output) range	-10.000 to +10.000 V	-10.000 to +10.000 V
DC current source/sink at 5 V output	5 mA	5 mA
DAC resolution (nom)	18 bits	12 bits
DC voltage source accuracy 1 year, (23 °C ± 5 °C) <sup>1,2,3</sup>	0.015% ± 0.004%	1.0% ± 0.4%
Settling time (typ)	100 ms	1 ms
Source resistance (nom)	200 Ω	200 Ω

M9183A source DC voltage, measure DC current	
DC voltage source (output) range	-10.000 to +10.000 V
DC current measurement range	0 to ± 20 mA
Voltage resolution (nom)	5 mV
Voltage source accuracy 1 Year, (23 °C ± 5 °C) <sup>1,2,3</sup>	1.0% ± 0.35%
Settling time (typ)	100 ms
DC current measurement accuracy	0.1% + 0.005%

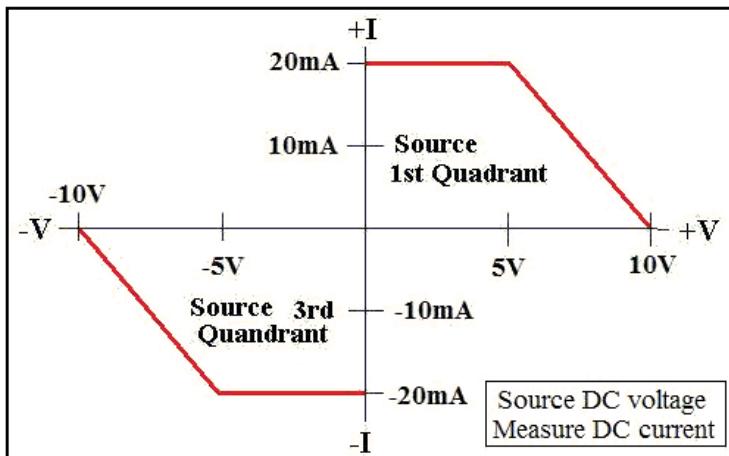

M9183A source DC current, measure DC voltage			
DC voltage measurement range	0 to ± 2.0 V		
Current output	Compliance voltage	Minimum Level	Source Accuracy 1 year, (23 °C ± 5 °C) <sup>1,2,3</sup>
< 1.25 μA	4.2 V	10 nA	1% + 1%
< 12.5 μA	4.2 V	50 nA	1% + 1%
< 125 μA	4.2 V	100 nA	1% + 0.5%
< 1.25 mA	4.2 V	1 μA	1% + 0.5%
< 12.5 mA	1.2 V	10 μA	1% + 0.5%

1. Specifications are for one hour warm up, within one hour self-cal, slow AC filter.

2. For temperatures outside the range of 23 °C ± 5 °C, but within 0 °C to 50 °C, add 0.1 × accuracy specification per °C.

3. Repetitive reading at an aperture of 133 ms or higher.

# TECHNICAL SPECIFICATIONS AND CHARACTERISTICS

## Triggering Characteristics

The M9182A and M9183A have advanced triggering capabilities that exceed those found on other digital multimeters. Advanced triggering enables you to obtain the signal you need and accurately measure it, in a variety of applications.

External hardware trigger	
Trigger input voltage level range (at DIN 7 connector)	+3 to +15 V activates the trigger
Minimum trigger pulse width	Aperture + 50 µs
Trigger input impedance	3 kΩ
Edge	Selectable positive or negative edge

PXI bus trigger inputs	
Trigger input voltage level range (via PXI backplane)	CMOS level (see PXI standard)
Minimum trigger pulse width	Aperture + 50 µs
Edge	Selectable positive or negative edge


Trigger features		
Trigger sources		Immediate, PXI trigger , external DIN connector, analog threshold trigger source
Trigger delay [Auto delay (default delay) ensures 1st reading accuracy in most configurations]	Measurement delay	50 µs to 15 s
	Resolution	1 µs to 65 ms and 16 µs above 65 ms
Reading storage		Circular buffer - 80 readings
Multi Sample Mode (DCV and DCI functions only)	Aperture range	2.5 µs to 160 ms (M9183A) 130 µs to 160 ms (M9182A)
	Maximum read interval range	1sec for apertures ≥ 625 µs, else 65 ms
	Reading per trigger	Up to 80 readings (pre- or post-trigger), at least 1 post trigger
	Trigger sources	PXI trigger, external DIN connector, and analog threshold (accuracy within 5% of range)

## MEASUREMENT CHARACTERISTICS

### Resolution vs. Aperture and Reading Rate for DCV, DCI, $\Omega$

Measurement aperture	Maximum readings per second	Resolution
10 ms	98	6½ digits (22 bits)
625 $\mu$ s	1,200	5½ digits (18 bits)
130 $\mu$ s	4,500	4½ digits (14 bits)
2.5 $\mu$ s	15,000 (M9183A only) <sup>1</sup>	4½ digits (14 bits)


1. 15,000 readings/second represent a typical maximum with a measurement aperture of 2.5  $\mu$ s. Results will vary, depending on what PC hardware, PXI hardware, and driver are used.

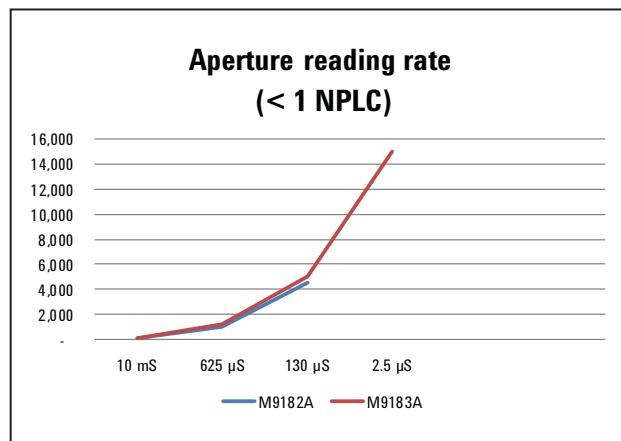

### Transaction Speed

Transactional I/O speed is a single reading measurement. This is important when you are taking many single measurements with the DMM. The M9183A delivers the highest transactional measurement speed in its class. These fast readings, up to 15,000 readings per second with a read interval rate of 66  $\mu$ s, provides the lowest latency, translating into higher test-system throughput and lower cost of test per unit tested.

Variable delay can be programmed to allow fully settled readings in most configurations.

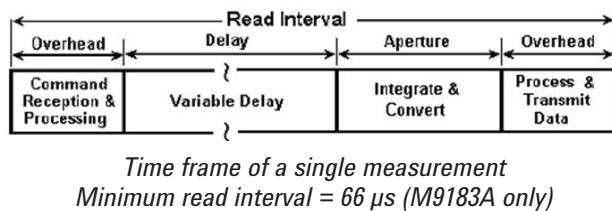

### System Reading and Throughput Rates

Switching ranges within a function	Aperture (A)	Range change time (ms)
DCV	A ≤ 20 ms	(A × 0.2) + 15
	A > 20 ms	A + 15.6
Resistance (2-wire or 4-wire)	A < 33 ms	(A × 0.05) + 15.5
	A ≥ 33 ms	A + 13
DCI (200 mA or 2 A to any other range)	A ≤ 40 ms	4.2
	A > 40 ms	15.7
DCI (all other ranges)	All apertures	1
Capacitance	All apertures	12

Switch between functions	Aperture (A)	Function change time (ms)
DCV	A < 16 ms	15.6
	A ≥ 16 ms	A + 25
Resistance to DCI	A < 16.66 ms	7.8
	16.66 ms ≤ A < 40 ms	A × 0.65
DCV to capacitance	40 ms < A < 66.66 ms	7.8
	A ≥ 66.66 ms	(A × 0.51) + 45
Resistance to capacitance	A < 33.33 ms	23.4
	A ≥ 33.33 ms	(A × 0.65) + 50
Resistance to capacitance	A ≤ 33.33 ms	23.4
	33.33 ms < A < 80 ms	(A × 2) + 35
	80 ms ≤ A < 160 ms	23.4
	A ≥ 160 ms	160

## MEASUREMENT CHARACTERISTICS

DC voltage	
Measurement method	Delta-sigma A/D conversion
Input resistance	200 mV, 2.0 V ranges: >10 GΩ with typical leakage of < 50 pA; 20 V, 200 V, 300 V ranges: 10.0 MΩ
Input isolation	330 VDC, 250 VAC from Earth ground
Input overvoltage protection	330 VDC all ranges
DCV noise rejection	Normal mode rejection at 50, 60, or 400 Hz ± 0.5%; > 95 dB (apertures ≥ 0.160 s); CMRR (1 kΩ lead imbalance) ≥ 120 dB
True RMS AC voltage	
Measurement method	AC coupled (10 Hz to 100 kHz) true RMS — measures the AC component of an input waveform that consists of AC and DC components.
Crest factor	Maximum crest factor of 4 at full scale, 7 at 10% of range
Input impedance	1 MΩ, in parallel with < 300 pF
Settling time	< 0.5 sec to within 0.1% of final value Fast RMS: < 0.05 sec to within 0.1% of final value
Peak input	8 × 10 <sup>6</sup> volt Hz product (example: 250 V @ 32 kHz)
Input overvoltage protection	330 VAC all ranges
ACV noise rejection	Common mode rejection at 50 Hz or 60 Hz; 1 kΩ imbalance in either lead > 60 dB
Resistance	
Measurement method	Selectable 2-wire or 4-wire. Current source referenced to LO output
Offset compensation (M9183A only)	All ranges, use with apertures > 5 ms $V_{offset} + (I^*R) < 2.2$ V for ranges ≥ 2 kΩ $V_{offset} + (I^*R) < 0.22$ V for ranges < 2 kΩ
Maximum test voltage	240 mV for 20 Ω and 200 Ω ranges; 2.4 V for 20 kΩ to 20 MΩ ranges; 1.0 V for 200 MΩ range (M9183A only)
Maximum lead resistance (4-wire)	50 kΩ for 200 kΩ, 2.0 MΩ, and 20 MΩ ranges; 5 kΩ for 20 kΩ range 500 Ω for 200 Ω and 2 kΩ ranges; 50 Ω for 20 Ω range
Input protection	330 V on all ranges
DC current	
Shunt resistance	10 Ω for 2 mA and 20 mA, 0.1 Ω for 200 mΩ and 2 A; Virtual zero shunt for 200 μA, 20 μA, 2 μA, and 200 nA range (M9183A only)
Input protection	Protected with 2.5 A, 250 V fast blow fuse
True RMS AC current	
Measurement method	AC coupled true RMS measurement (measures the AC component only.) analog RMS DC converter.
Shunt resistance	10 Ω for 2 mA and 20 mA, 0.1 Ω for 200 mA and 2 A
Input protection	Protected with 2.5 A, 250 V fast blow fuse

## MEASUREMENT CHARACTERISTICS

Frequency and period		
Measurement method	Direct (conventional) counting	
Input impedance	1 MΩ with < 300 pF	
Sensitivity (130 Hz)	.001 Hz	
Totalizer (M9183A only)		
Active edge polarity	Positive or negative transition	
Maximum count	10,000,000,000	
Allowed rate	1 to 30,000 events per second	
Threshold	Set threshold DAC	
Accuracy	±2 counts	
Capacitance		
Measurement method	Differential charge balance: variable currents used to stimulate dV/dt response.	
Connection type	2-wire	
Environmental and physical characteristics		
Temperature range	Operating -10° to 55 °C Non-operating -40° to +85 °C	
Relative humidity	Operating to 80% at 40 °C Storage to 95% at 40 °C	
Connectors	V HI, 2-wire Ω IN, DCV OUT V LO, 2-wire Ω IN, DCV OUT I HI, 4-wire Ω IN I LO, 4-wire Ω IN Sync OUT External Trigger IN Trigger and Sync common	Sheathed banana jack Sheathed banana jack Sheathed banana jack Sheathed banana jack DIN 7, pin 2 DIN 7, pin 7 DIN 7, pin 4
Safety	Complies with IEC 61010-1, CAT II 300 V, pollution degree 2	
EMC	Complies with EN61326-1 Industrial Environment	
Warm-up time	1 hour	
Physical characteristics		
Dimensions	3U/1-slot PXI/CompactPCI standard	
Weight	0.5 kg (1 lb.)	
Power dissipation:		
+5 V	Total power	
300 mA	1.5 W max	

# CONFIGURATION

## Hardware<sup>1</sup>

Model	Description
M9182A	PXI 6½ digit multimeter, high performance
M9183A	PXI 6½ digit multimeter, enhanced performance
DMM units include:	Getting started guide, software drivers, user and service documentation (on CD ROM), Agilent I/O libraries

1. The M9182A and M9183A are intended for use in a PXI chassis.

## Software

Model	Description
Supported Operating Systems	Microsoft Windows XP (32-bit), Microsoft Windows Vista (32/64-bit), Microsoft Windows 7 (32/64-bit)
Standard Compliant Drivers	IVI-C, IVI-COM, LabVIEW
Supported Application Development Environments (ADE)	VisualStudio (VB.NET, C#, C/C++)®, LabVIEW, MATLAB
Agilent IO Libraries	Includes: VISA Libraries, Agilent Connection Expert, IO Monitor

## Calibration and Warranty

### Advantage services: calibration and warranty

Agilent Advantage Services is committed to your success throughout your equipment's lifetime.

### Calibration

R-50C-011-3 Yearly calibration, for 3 years

R-50C-011-5 Yearly calibration, for 5 years

### Warranty

Standard warranty is 1 year

R-51B-001-3C 1 year return-to-Agilent warranty extended to 3 years


R-51B-001-5C 1 year return-to-Agilent warranty extended to 5 years

## Accessories

Model	Description
34138A	Test lead set

## Related products

Model	Description
M9018A	18-slot PXIe chassis
M9021A	PXIe system interface
M9121A	PXI high-density matrix switch
M9131A	PXI SPDT switch, 64 channel
M9101A	PXI high-density multiplexer, 64 channels
M9103A	PXI high-density multiplexer, 99 channels, armature relays
M9120A	PXI high-density matrix switch, 4x32, armature relays
M9181A	PXI digital multimeter, 6½ digit, basic features

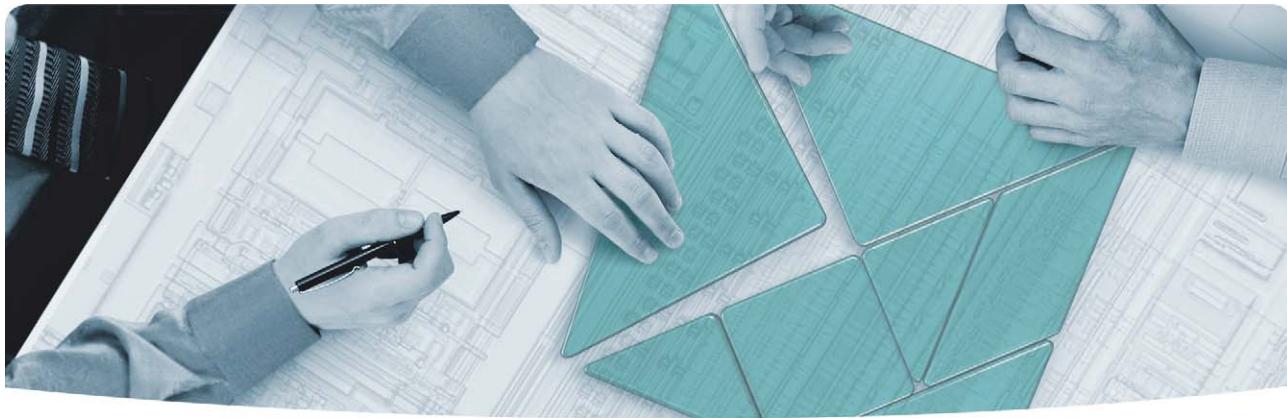

## The Modular Tangram

The four-sided geometric symbol that appears throughout this document is called a tangram. This seven-piece puzzle originated in China a few centuries ago. The goal is to create shapes—from simple to complex—that form an identifiable silhouette. As with a tangram, the possibilities may seem infinite as you begin to create a new test system. With a set of clearly defined elements—architecture, hardware, software—Agilent can help you create the system you need, from simple to complex.



### Discover the Alternatives ...

... Agilent **Modular** Products



Agilent Advantage Services is committed to your success throughout your equipment's lifetime. We share measurement and service expertise to help you create the products that change our world. To keep you competitive, we continually invest in tools and processes that speed up calibration and repair, reduce your cost of ownership, and move us ahead of your development curve.

[www.agilent.com/find/advantageservices](http://www.agilent.com/find/advantageservices)



PXI is a registered US trademark of PXI Systems Alliance. Visual Studio, Visual C, C++, and C#, and Visual Basic are registered trademarks of Microsoft Corporation. Windows and MS Windows are U.S. registered trademarks of Microsoft Corporation. MATLAB is a U.S. registered trademark of The Math Works, Inc.

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2011 Printed in USA, September 26, 2011  
5990-7580EN

[www.agilent.com](http://www.agilent.com)

[www.agilent.com/find/modular](http://www.agilent.com/find/modular)

[www.agilent.com/find/pxi-switch](http://www.agilent.com/find/pxi-switch)

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at: [www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

#### Americas

Canada	(877) 894 4414
Brazil	(11) 4197 3500
Mexico	01800 5064 800
United States	(800) 829 4444

#### Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Thailand	1 800 226 008

#### Europe & Middle East

Austria	43 (0) 1 360 277 1571
Belgium	32 (0) 2 404 93 40
Denmark	45 70 13 15 15
Finland	358 (0) 10 855 2100
France	0825 010 700*
	*0.125 €/minute
Germany	49 (0) 7031 464 6333
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
Switzerland	0800 80 53 53
United Kingdom	44 (0) 118 9276201
Other European Countries:	<a href="http://www.agilent.com/find/contactus">www.agilent.com/find/contactus</a>

Revised: July 17, 2010



**Agilent Technologies**