



**Model 5700TP12G18,  
M1 through M11  
5700 Watt Pulse Amplifier  
12–18 GHz**


The Model 5700TP12G18 is a self contained, forced air cooled, broadband traveling wave tube (TWT) microwave amplifier system designed for pulse applications at low to moderate duty factors where instantaneous bandwidth and high gain are required. Reliable TWT subsystems provide a conservative 5700 watts minimum peak RF pulse power at the amplifier output connector. Stated power specifications are at the fundamental frequency.

The amplifier's front panel digital display shows forward and reflected average power output or forward and reflected peak power, plus extensive system status information accessed through a series of menus via soft keys. Status indicators include power on, warm-up, standby, operate, faults, excess average or peak reflected power warning and remote. Standard features include a built-in IEEE-488 (GPIB) interface, 0dBm input, TTL Gating, VSWR protection, gain control, RF output sample ports, auto sleep, plus monitoring of TWT helix current, cathode voltage, collector voltage, heater current, heater voltage, baseplate temperature and cabinet temperature. Modular design of the power supply and RF components allow for easy access and repair. Use of switching mode power supplies results in significant weight reduction.

The rated power is developed by efficiently power combining the outputs from two 3400 watts (nominal) pulse TWTs that are factory matched in gain and phase, resulting in an excellent combination of wide instantaneous bandwidth with improved harmonic levels.

Housed in a stylish contemporary cabinet, the amplifier provides readily available pulsed RF power for a variety of applications in Test and Measurement, (including EMC RF pulse susceptibility testing), Industrial and University Research and Development, and Service applications. AR also offers a broad range of amplifiers for CW (Continuous Wave) applications.

See Model Configurations for alternative packaging and prime power selection.

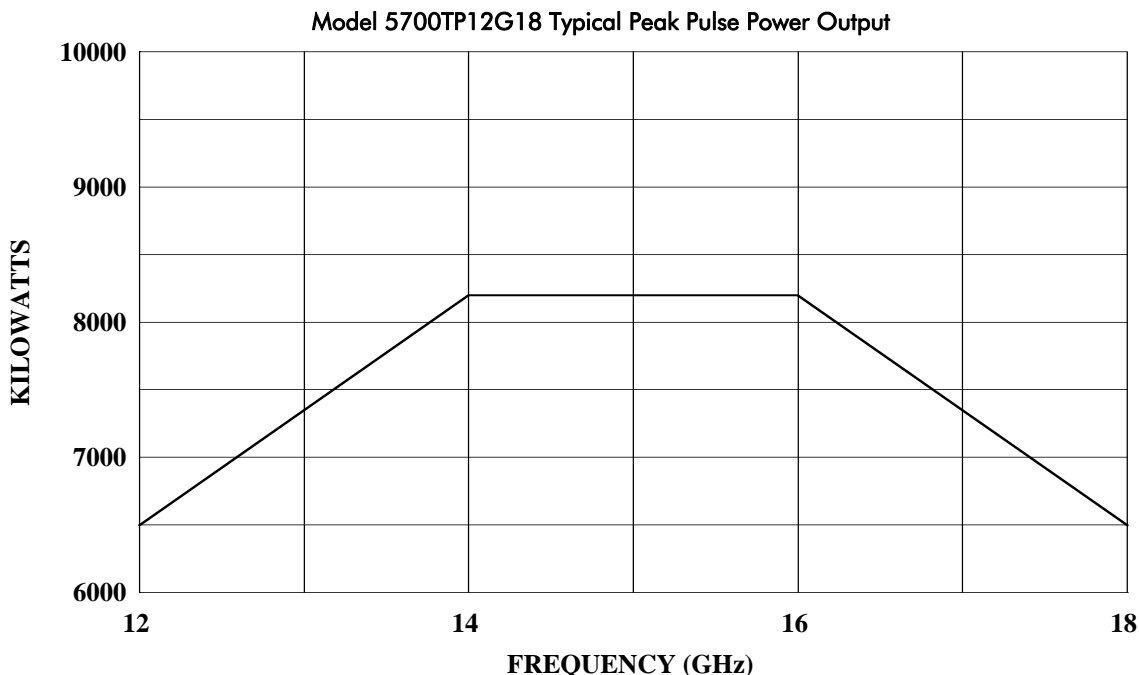

## SPECIFICATIONS, MODEL 5700TP12G18

### POWER (Fundamental), Peak Pulse, @ Output

Nominal .....	7,000 watts
Minimum .....	5,700 watts

FLATNESS.....  $\pm 10$  dB maximum,  $\pm 5$  dB at rated power

FREQUENCY RESPONSE ..... 12-18 GHz

INPUT FOR RATED OUTPUT ..... 1.0 milliwatt maximum

GAIN (at maximum setting) ..... 67 dB minimum

GAIN ADJUSTMENT (continuous range)..... 35 dB minimum

INPUT IMPEDANCE..... 50 ohms, VSWR 2.5:1 maximum

OUTPUT IMPEDANCE ..... 50 ohms, VSWR 2.5:1 typical

MISMATCH TOLERANCE..... Output pulse width foldback protection at peak reflected power exceeding 3000 watts. Will operate without damage or oscillation with any magnitude and phase of source and load impedance. May oscillate with unshielded open due to coupling to input. Should not be tested with connector off.

### PULSE CAPABILITY

Pulse Width.....	0.2 – 50 microseconds.
Pulse Rate (PRF).....	100 kHz maximum
Duty Cycle .....	4% maximum.
RF Rise and Fall.....	35 ns max (10% to 90%).
Delay.....	300 ns maximum from pulse input to RF 90%
Pulse Width Distortion.....	$\pm 30$ ns maximum (50% points of output pulse width compared to 50% points of input pulse width)
Pulse Off Isolation .....	80 dB minimum, 90 dB typical
Pulse Input .....	TTL level, 50 ohm nominal termination

### NOISE POWER DENSITY

(pulse on) .....	Minus 55 dBm/Hz (maximum); Minus 80 dBm/Hz (typical)
(pulse off) .....	Minus 140 dBm/Hz (typical)

HARMONIC DISTORTION ..... Minus 15 dBc maximum

PRIMARY POWER ..... See Model Configurations

### CONNECTORS

RF input .....	Type N precision female on rear panel
RF output .....	Type WR-62 waveguide flange / coax on rear panel
RF output sample ports (forward and reflected) .....	Type N precision female on rear panel
Pulse input .....	Type BNC female on rear panel
GPIB.....	IEEE-488 female on rear panel
Interlock .....	DB-15 female on rear panel

COOLING..... Forced air (self contained fans), air entry and exit in rear.

SIZE (W x H x D)..... 50.3 x 43 x 84 cm, 19.8 x 17 x 33 in

WEIGHT (approximate) ..... 121 kg, 265 lbs

**MODEL CONFIGURATIONS, MODEL 5700TP12G18**

- E Package Alternatives.** May select an alternative from the following [E1C or (E1C and E2S) and/or E3H]:
- E1C Cabinet:** Without outer enclosure for rack mounting, size (W x H x D) 49 x 40 (9U) x 76 cm, 19 x 15.75 (9U) x 30 in., Subtract approximately 16 kg, 35 lbs, for removal of outer enclosure.
- E2S Slides:** slides installed, add approximately 5 kg, 10 lbs.
- E3H Handles:** Front pull handles installed.
- P Prime Power:** Must select one primary power from the following [P1 or P2]
- P1 208V, US:** 208 VAC ± 10%, 3 phase, delta (4 wire) 50/60 Hz, 5 KVA maximum
- P2 400V, Europe:** 360-435 VAC, 3 phase, WYE (5 wire) 50/60 Hz, 5 KVA maximum. CE marked to comply with EMC European Directive 89/336/EEC for operation inside a shielded room.

Model No.	Features	
	E	P
<b>5700TP12G18</b>	Base model	P1
<b>M1</b>	E1C	P1
<b>M2</b>	E3H	P1
<b>M3</b>	E1C & E3H	P1
<b>M4</b>	E1C & E2S	P1
<b>M5</b>	E1C & E2S & E3H	P1
<b>M6</b>	–	P2
<b>M7</b>	E1C	P2
<b>M8</b>	E3H	P2
<b>M9</b>	E1C & E3H	P2
<b>M10</b>	E1C & E2S	P2
<b>M11</b>	E1C & E2S & E3H	P2

Model number example: Model 5700TP12G18M2 would have option E3H front pull handles installed.